
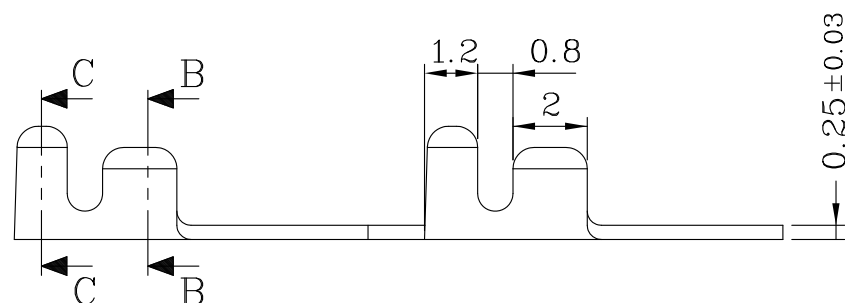


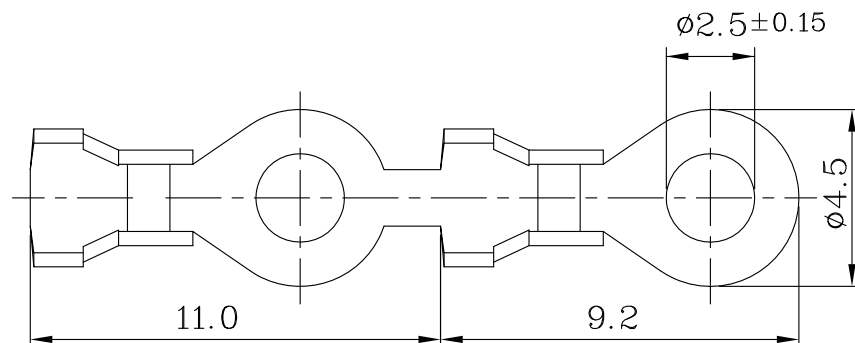

NOTE:

1. 表面處理



鍍錫

40u" 以上

1.SURFACE TREATMENT:

TIN PLATING

THICKNESS MORE THAN 40u"



料厚 THICKNESS	0.25	包裝數量 PACKING Q'TY	25000 PCS/R	適用電線 WIRE RANGE	24~20
間距 PITCH	11.0	對手件 MATING PART	TAB:		

0.3t	RT-25T3T-20	鍍錫 TIN PLATING
	RT-25T3-20	素材 NONE
0.25t	RT-25T25T-20	鍍錫 TIN PLATING
	RT-25T25-20	素材 NONE
THICKNESS	PART NO.	FINISH

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ± 0.05

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

RT-25T45xx-20-LF

SERIES LEADFREE
20~24 AWG

INSIDE DIAMETER 2.50
OUTER DIAMETER 4.50
3:THICKNESS 0.3t /NONE
3T:THICKNESS 0.3t /TIN
25:THICKNESS 0.25t /NONE
25T:THICKNESS 0.25t /TIN

DESCRIPTION: