
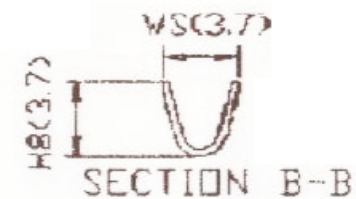
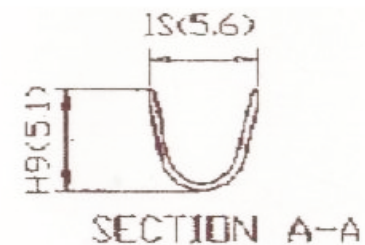
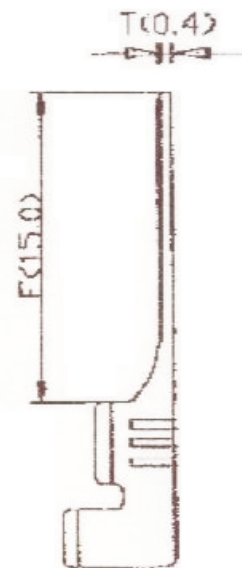


一般公差	
冲压件	
尺寸	公差
20以下	±0.3
21-30	±0.4
31-50	±0.5
51-100	±0.6
凡未标注公差者均用此表	

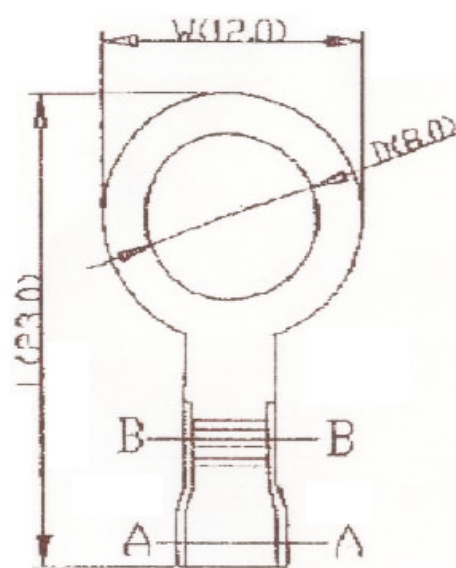

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PJECTION

照片框

ORDER INFORMATION

RT-80T120-16-LF
SERIES | | | LEADFREE
| | | 16 AWG
| | | OUTER DIAMETER 12.00
| | | TIN
| | | INSIDE DIAMETER 8.00

DESCRIPTION:

R3.2 鉤圈
RING TONGUE TERMINAL