


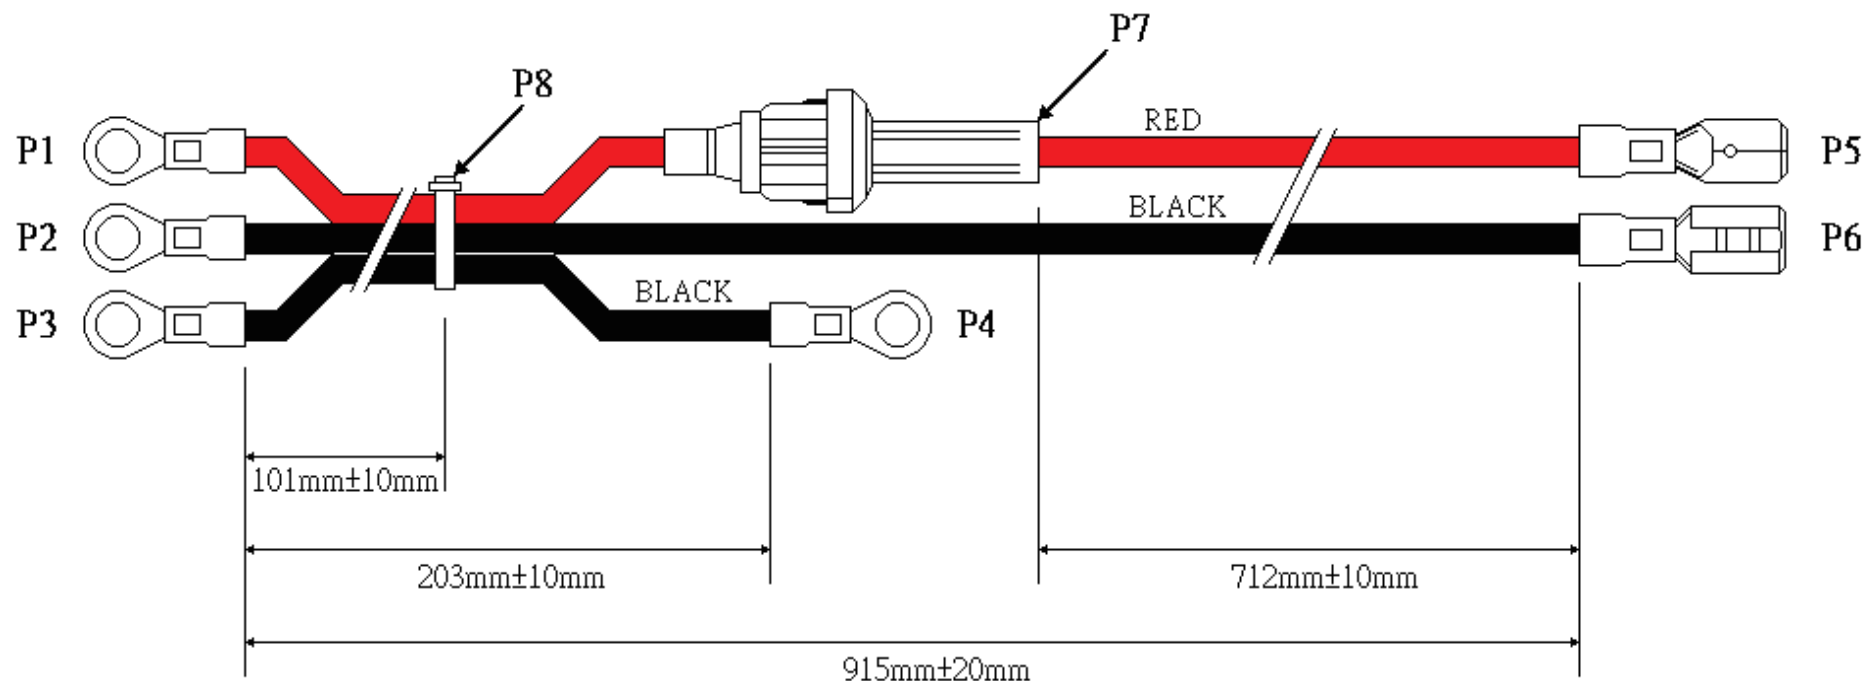

1. P1,P2,P3,P4 : RING TERMINAL Ø 5.3mm VINYL INSULATED COLOR=YELLOW
2. P5 : .250×.032(6.3×0.8) MALE DISCONNECTOR VINYL INSULATED COLOR=YELLOW
3. P6 : .250×.032(6.3×0.8) FEMALE DISCONNECTOR VINYL INSULATED COLOR=YELLOW
4. P7 : FUSE AND FUSE HOLDER INLINE 30A 32V COLOR=WHITE
5. P8 : CABLE TIE COLOR=WHITE
6. WIRE IS UL(1015) 16AWG 105°C 600V PVC JACKET

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

RTQTX42-5368F30A16-F36N-LF

SERIES 5.3Ø 6.3X0.8 16AWG FUSE 30AMP 36 INCH LEADFREE FEMALE TO FEMALE

DESCRIPTION: