


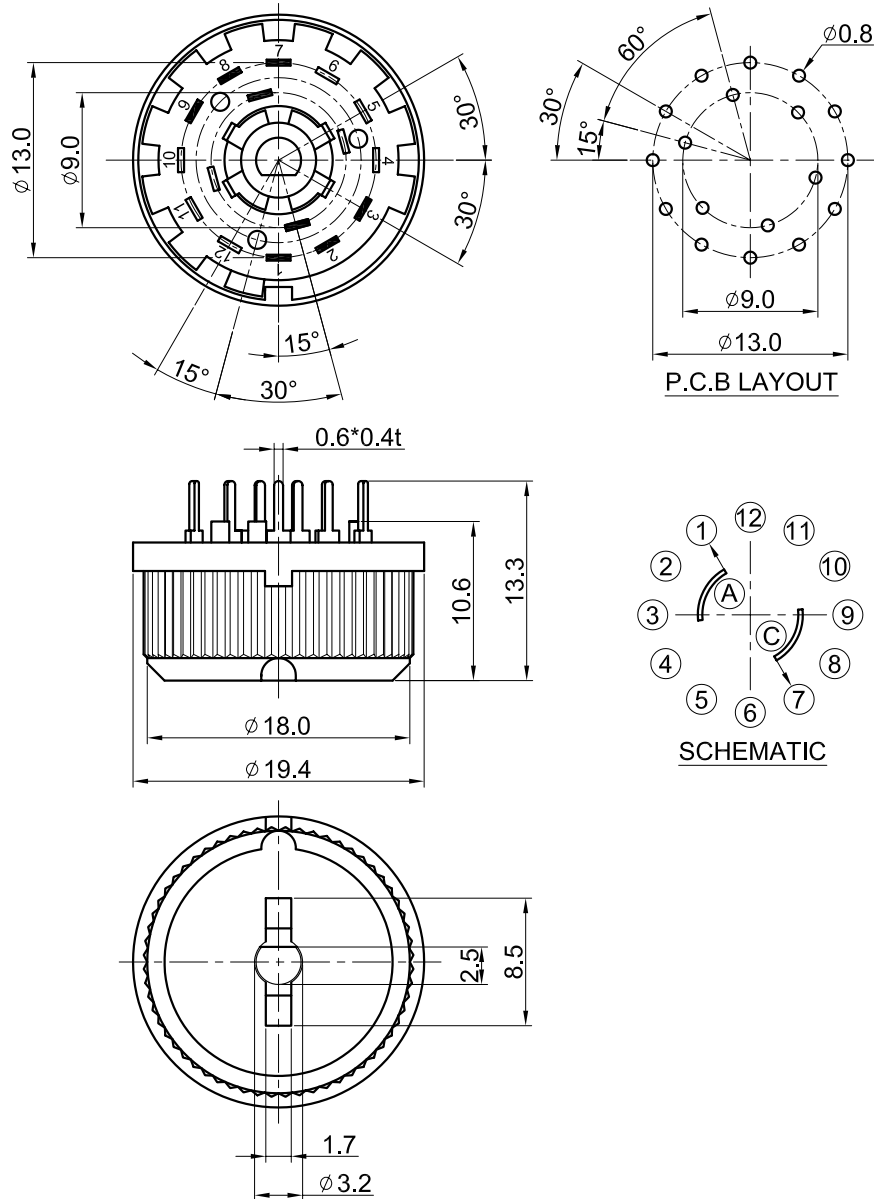

1. 開關負載值 SWITCH RATING : AC 150 V 0.3 A MAX
DC 30 V 1 A

2. 機械性能 MECHANICAL STRUCTURE

2.1 操作力矩: 2.5Ncm $\pm 25\%$ (1 pole)

ROTATION TORQUE: 2.5Ncm $\pm 25\%$ (1 pole)

2.2 止動強度: 4 kg 15 秒時間

STOPPER STRENGTH: 4kg FOR 15 秒

2.3 回轉角度: 30 3 (每個波段)

ROTATION ANGLE: 30 3 (1pole)

2.4 開關形式: 2 回路 3 接點

SWITCH TYPE: 2 POLE 3 POSITION

2.6 耐久次數: LIFE TEST: 10,000 CYCLES

3. 電氣特性 ELECTRICAL STRUCTURE

3.1 接觸電阻: 在 DC 5V 1A 與 1KHZ (2mV) 條件下測定為 25 mΩ 以下.

CONTACT RESISTANCE: LESS THAN 25 mΩ ON DC 5V 1A MEASURED
BY VOLTAGE DECREASING METHOD OR
MEASURED BY 1 KHZ LESS THAN 2mV.

3.2 絕緣阻抗: 在 DC 500 V 條件下大於 1000 MΩ

INSULATION RESISTANCE: MORE THAN 1000 MΩ, ON DC 500 V.
MEASURED BY INSULATION TESTER.

3.3 耐電壓: AC 1000 V (50 ~ 60HZ) 1分鐘.

WITHSTAND VOLTAGE: AC 1000 V (50 ~ 60HZ) FOR 1 MIN.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

less than 10 ± 0.3
above 10~30 ± 0.5
above 30~100 ± 1.0
angular dimension $\pm 5^\circ$

照片框

ORDER INFORMATION

RTSW19-D10-0203-LF

SERIES

LEADFREE

2+3 PIN

HIGH 10.6mm

DIP 180°

DESCRIPTION: Rotary Switch\SR20\Spec