

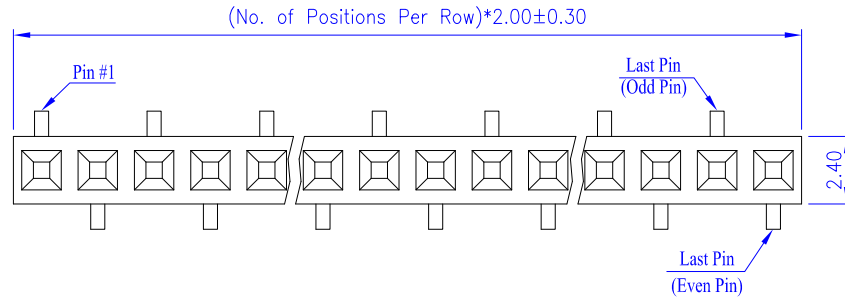



R Type

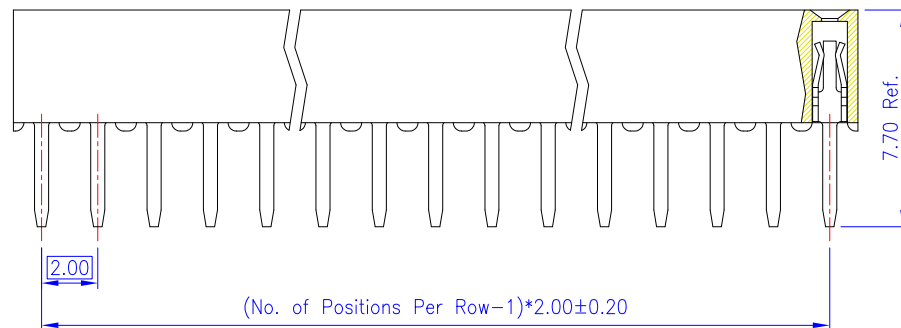


L Type

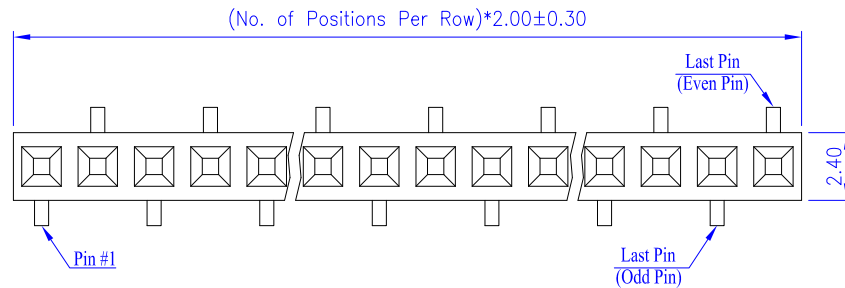

R Type

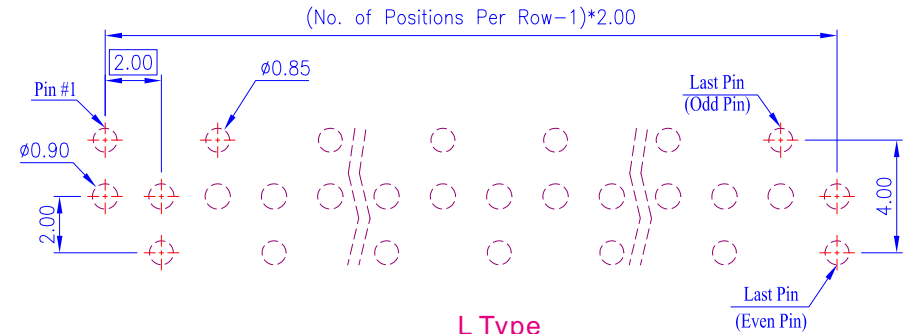

L Type

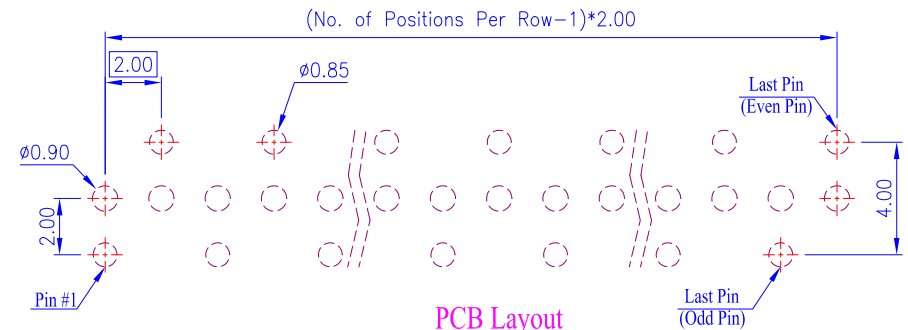

PCB Layout (Top View)

Material and Finish

1. Housing: Nylon 9T (UL94V-0), Black.
2. Terminal: Copper Alloy ($t=0.20\text{mm}$), Gold Plating.

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.
4. Connect Resistance: 30m Ohms Maximum.

Mechanical Characteristics

1. Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm
DATE

SCALE 1 : 1

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

S-B40-1Xxy-LF
SERIES
LEADFREE
L:L TYPE
R:R TYPE
1X02:02 WAY
1X40:40 WAY
BOOTOM ENTRY 4.0mm

DESCRIPTION: 2.00mm Post Header Receptacle PCB Mount Vertical Type, Single Row
Pass-Through Entry -- 4.00mm (4.30*2.40mm)