


## SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30 seconds  
(260° for 7 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P. (UL 94 V-0)

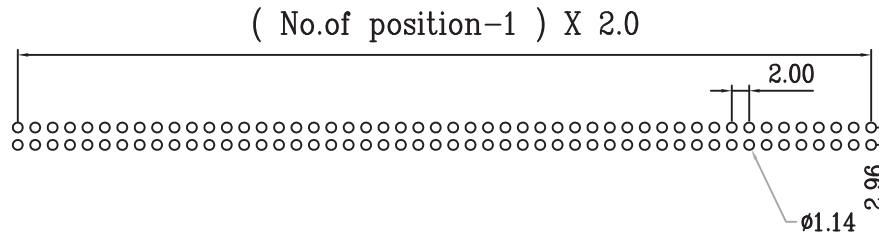

P.C.B.layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

**ORDER INFORMATION**

S-D21C-2Xxx-LF  
SERIES | LEADFREE  
2X02:04WAY  
2X40:80WAY  
CAP  
HIGH 2.1mm  
DIP 180°

**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)

DESCRIPTION: 2.0mm Female Socket h=2.0mm type