

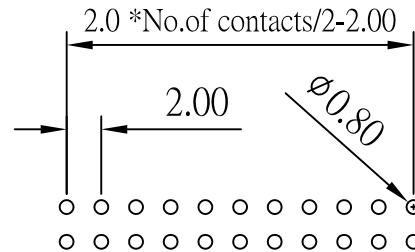


Recommended P.C. Board Hole Layout

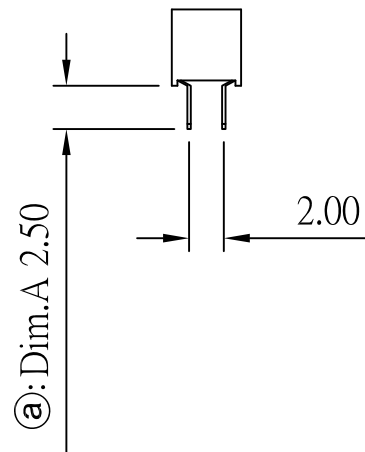

Current Rating and voltage: 2 Amps 250V(r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Plastic, UL 94V-0
 Finish: Standard: Gold Flash all over

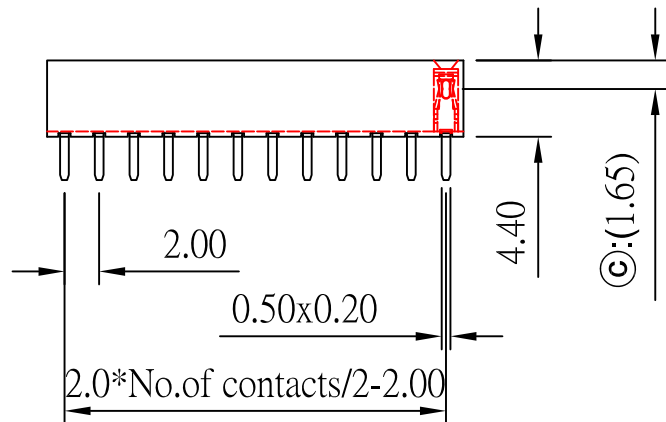

04~20 pin : 0.10mm
 22~50 pin : 0.20mm
 52~80 pin : 0.30mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

S-D4425-2Xxx-LF
 SERIES | LEADFREE
 2X02:04WAY
 2X40:80WAY
 DIP 2.5mm
 HIGH 4.4mm
 DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: