




Recommended P.C. Board Hole Layout



Specifications

Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +125°C
 Contact Material : See the Option
 Insulator Material : Polyester, UL 94V-0 Nylon-9T
 Contact Plated : See Option
 Standard: Full Gold Flash

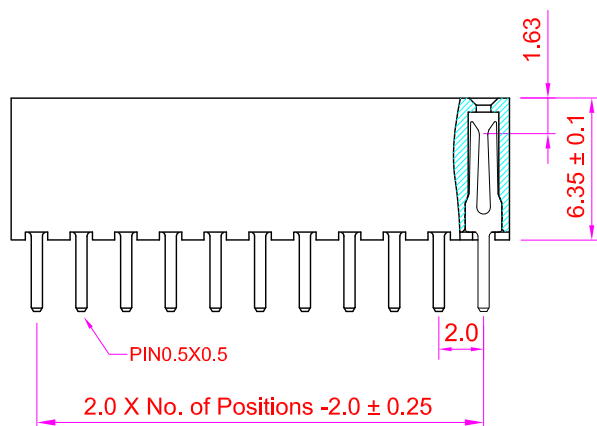

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

S-D63-3Xxx-LF
 SERIES | LEADFREE
 DIP 180° | 3X03:09WAY
 3X40:120WAY
 HIGH 6.3mm

DESCRIPTION: Female Header P:2.0 x 2.0mm Profile :6.35mm, Triple Row, Straight Type