
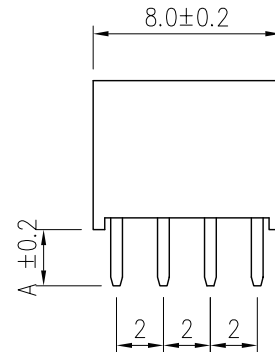


**Recommended  
P.C. Board Layout**

Specifications

- Current Rating : 2 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature :  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0
- Standard : Nylon-6T
- Contact Plated : See Option / Standard: Full Gold

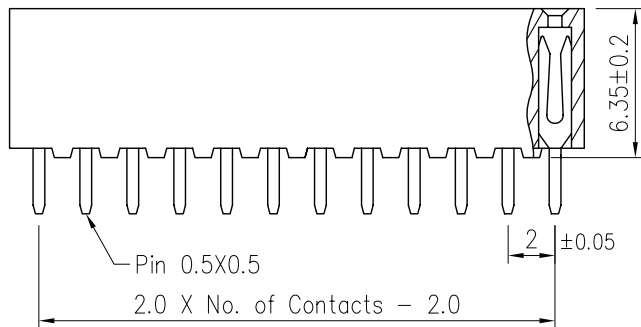

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE


SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION



**ORDER INFORMATION**

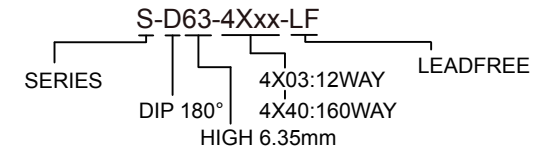

DESCRIPTION: Female Header Pitch 2.0mm 6.35mm, 4 RowS, Straight Type