


Current Rating and Voltage: 3 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: **Brass**
 Insulator Material: High Temperature
 Plastic,UL 94V-0
 Finish: Standard:Gold Flash all over

Recommended P.C. Board
Hole Layout

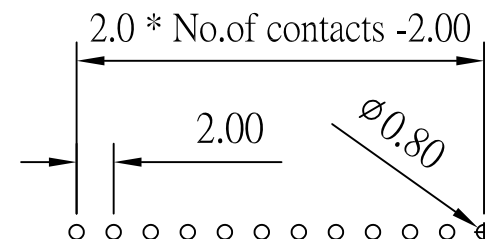

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, \pm
X, \pm
.XX, \pm
.XXX, \pm
ANG, \pm

照片框

ORDER INFORMATION

S-D71-1Xxx-LF
 SERIES | LEADFREE
 1X02:02WAY
 1X40:40WAY
 HIGH 7.1mm
 DIP 180°

DESCRIPTION: