
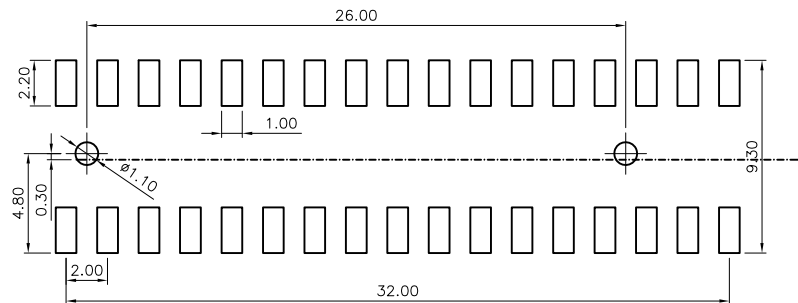
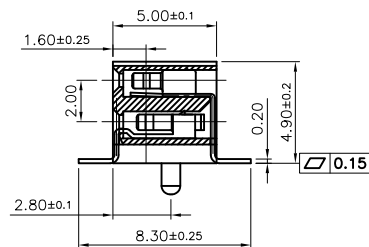
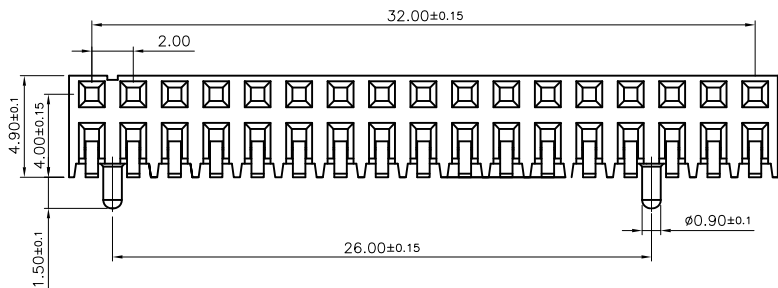


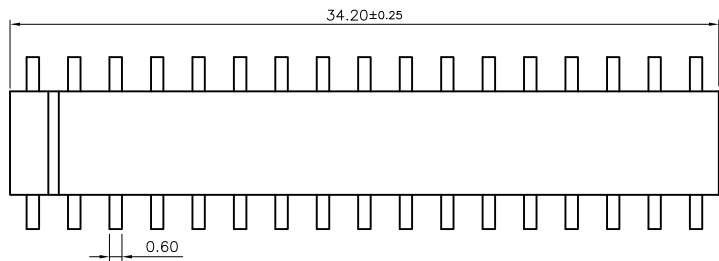

Recommended P.C.B.Layout

Technical Data :

Insulator Material :	High Temperature Thermoplastic,UL 94V-0
Contact :	stamped and formed,Phosphor Bronze
Plating :	Selective gold flash plated
Current Rating :	1 Amp
Contact resistance :	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature :	-40 °C to +105 °C.
Max. processing Temp :	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	Pitch 2.0mm, □0.50mm male header
Packing :	In Tape & Reel

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.13

DATE

.XXX ± 0.05

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

S-MP-2X17-LF
 SERIES | POST | LEADFREE
 34 WAY
 SIDE ENTRY SMT

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com