


**Specifications**

Current & Voltage Rating : 2A & 20Vac max.  
 Insulation Resistance : 3000 MΩ min.  
 Contact Resistance : 20 mΩ max.  
 Dielectric Withstanding : AC 500V  
 Operating Temperature : -40°C ~ +105°C  
 Max. Processing Temp. : 245±5°C for 3~5 seconds  
 Contact Material : Phosphor Bronze  
 Insulator Material : Nylon-6T / Nylon-6T (H.F),  
 UL 94V-0 (Black)  
 Finish : Gold plated  
 Packing : Tray

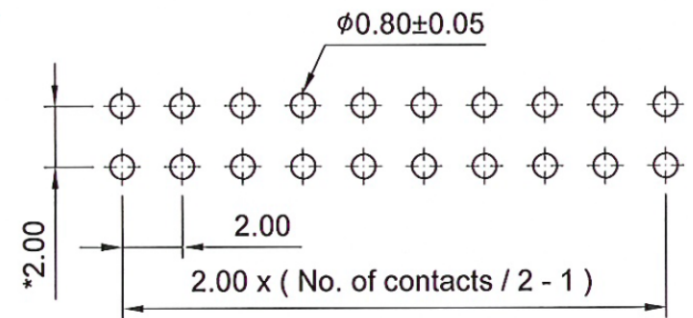

Recommended P.C.B. Layout

**RoHS Compliant**

TOLERANCES ARE



**煜倫股份有限公司**

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±  
 .X ± 0.30  
 .XX ±  
 .XXX ±  
 ANG ±

P PROJECTION

照片框

**ORDER INFORMATION**

S-R40-2Xxx-LF  
 SERIES | LEADFREE  
 2X03:06WAY  
 2X40:80WAY  
 LONG 4.0mm  
 DIP 90°

DESCRIPTION: