
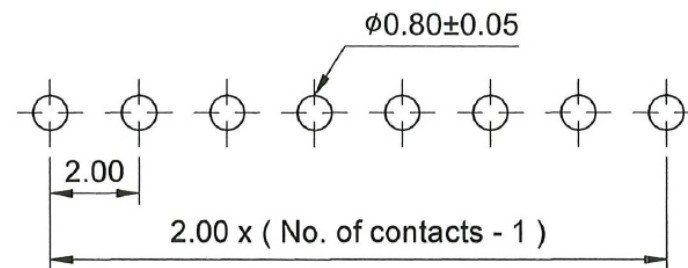


Specifications

- Current & Voltage Rating : 2A & 20Vac max.
- Insulation Resistance : 3000 MΩ min.
- Contact Resistance : 20 mΩ max.
- Dielectric Withstanding : AC 500 V
- Operating Temperature : -40°C ~ +105°C
- Max. Processing Temp. : 245±5°C for 3~5 seconds
- Contact Material : Phosphor Bronze
- Insulator Material : Nylon-6T , UL 94V-0 (Black)
- Finish : Gold plated
- Packing : Tray

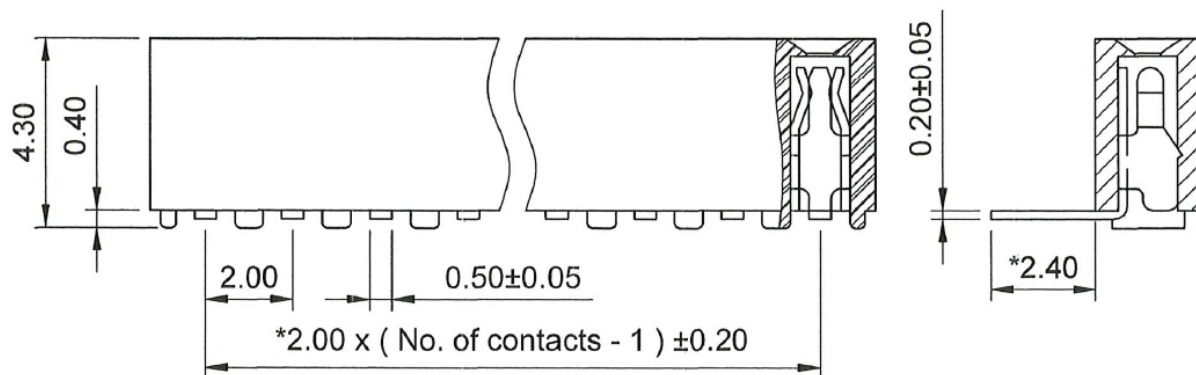

Recommended P.C.B. Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

S-R43-1Xxx-LF
SERIES | LEADFREE
1X03:03WAY
1X40:40WAY
HIGH 4.3mm
DIP 90°

DESCRIPTION: