





Female Header 2.0mm pitch H6.35
Right angle Type

Technical data:

Insulator body:	High temperature Thermoplastic, UL94V-0
Contact:	Stamped and formed, Phosphor Bronze
Plating:	Full gold flash plated
Current Rating:	1 Amp
Insulator resistance:	1000 Megohms min.
Dielectric withstanding:	AC 500V for 1 minute
Contact resistance:	20 milliohms. Max
Temperature Rating:	-55°C to +105°C.
Temperature:	230°C for 30-60 seconds. 260°C for 10 seconds.

Mates with: Pitch 2.0mm, □0.50mm male header

ROHS Compliant

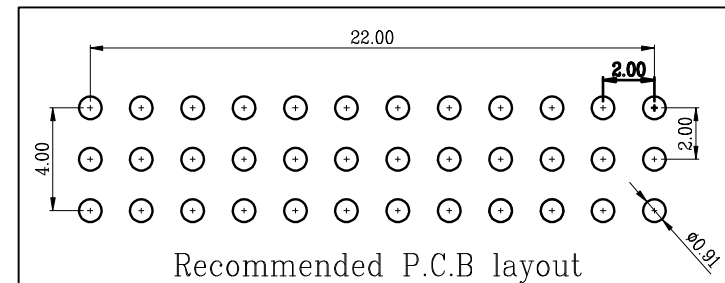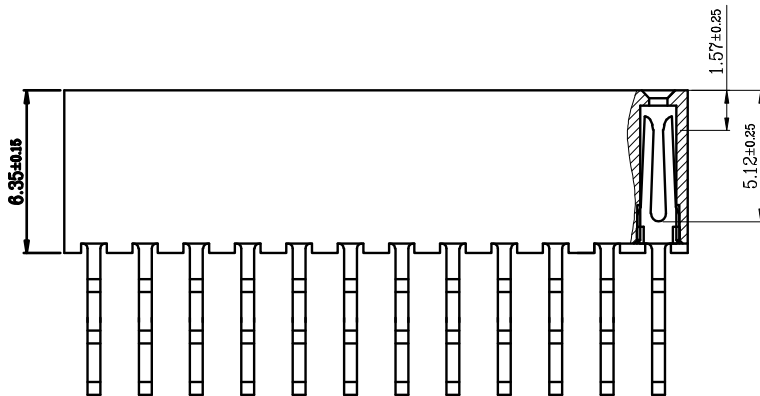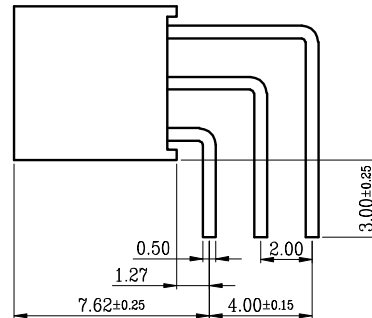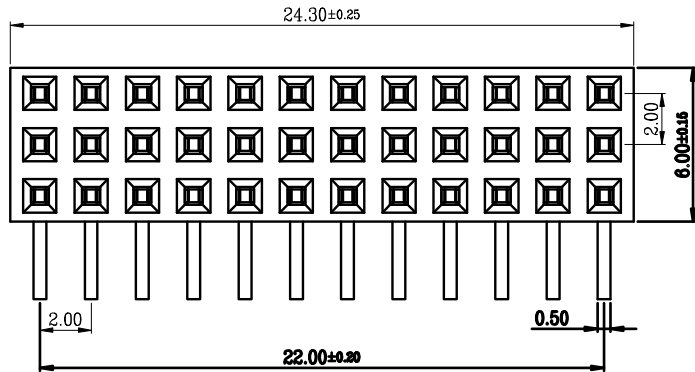

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
X. ± 0.25
.XX ± 0.15
.XXX ±
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

S-R63-3X12-LF
SERIES | LEADFREE
36 WAY
LONG 6.3mm
DIP 90°

DESCRIPTION: