
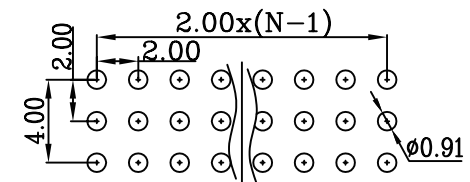
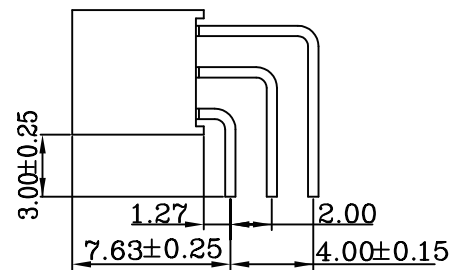


Technical Data :

Insulator Material: High Temperature Thermoplastic, UL 94V-0
 Contact : stamped and formed, Phosphor Bronze
 Plating: Au or Sn over Nickel
 Current Rating : 1 Amp
 Contact resistance: 20 milliohms Max.
 Insulator resistance : 1000 Megohms min.
 Dielectric withstanding : AC 500V for 1 Minute.
 Operating Temperature: -55°C to +105°C.
 Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.
 Mates with : Pitch 2.0mm, □0.50mm male header

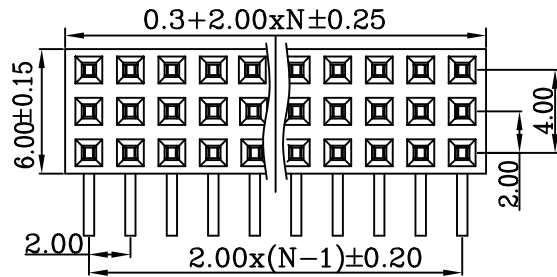

P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE

SIZE A4


P PROJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

S-R63-3Xxx-LF



DESCRIPTION: