
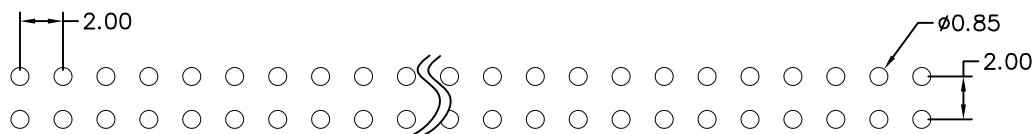
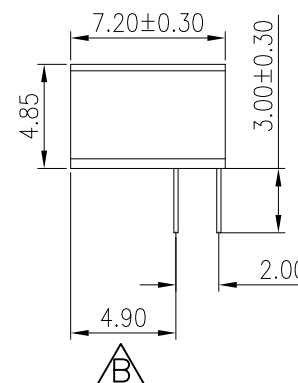


Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
 Contact Plated: All Gold Flash
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T

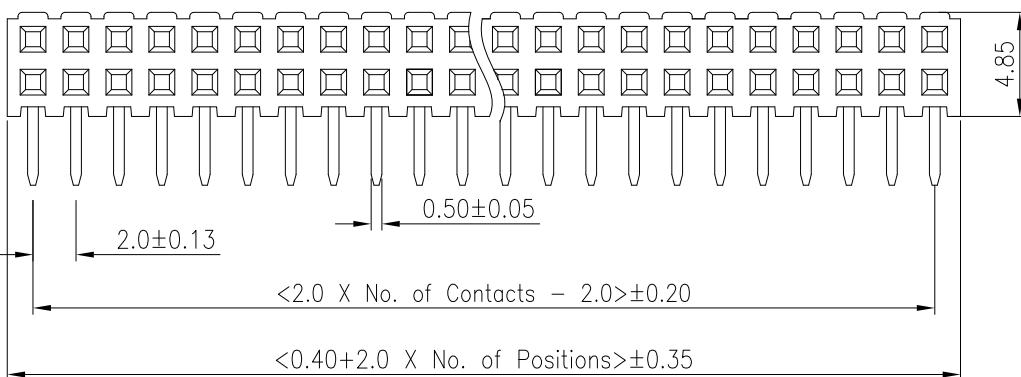

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°

P PROJECTION

照片框

ORDER INFORMATION

S-R72-2Xxx-LF
 SERIES | LEADFREE
 2X02:04WAY
 2X40:80WAY
 LONG 7.2mm
 DIP 90°

DESCRIPTION: FEMALE HEADER 2.0*2.0mm RIGHT ANGLE TYPE, DUAL ROWS HEIGHT 4.85mm TUBE

煜倫股份有限公司

www.morethanall.com