


Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding Voltage: 500VAC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T

Recommended P.C.Board Layout
 (Tolerance: ± 0.05)

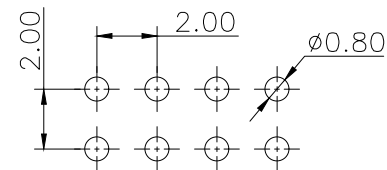

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG \pm

PJECTION

照片框

ORDER INFORMATION

S-R72C-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X40:80WAY
 MYLAR
 DIP 90° LONG 7.2mm

DESCRIPTION: 2.00 FEMALE HEADER DUAL ROW (R/A) TYPE SIDE ENTRY