
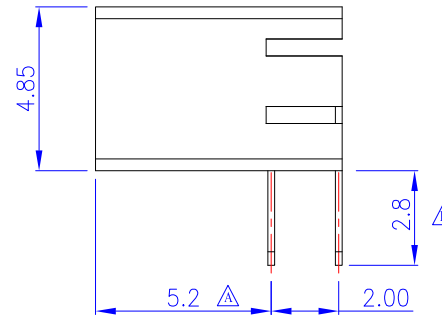


PCB Layout
(Top View)

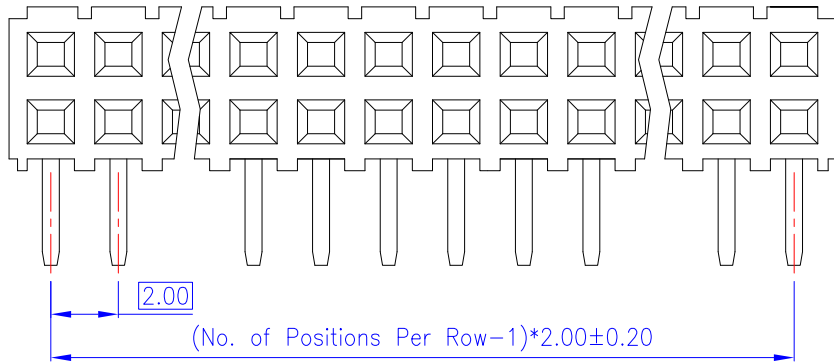

Material and Finish

1. Housing: Nylon 9T (UL94V-0), Black.
2. Terminal: Copper Alloy (t=0.20mm), Gold Plating.

Electrical Characteristics

1. Current Rating: 1.0 Amp. Max..
2. Dielectric Withstand Voltage:
800V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 500V DC.
4. Connect Resistance: 30m Ohms Maximum.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

.XXX ± 0.10

DATE

ANG ±

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

照片框

ORDER INFORMATION

S-R7348-2Xxx-LF

SERIES	LEADFREE
	2X03:06WAY
	2X50:100WAY
	HIGH 4.85mm
LONG 7.3mm	
DIP 90°	

DESCRIPTION: 2.00mm Post Header Receptacle PCB Mount Right Angle Type, Dual Rows