


### SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Contacts resistance :20 m ohms max.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30 seconds  
(260° for 7 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: NL-9T (UL 94 V-0)

S-R7354-2XxxE20-LF  
LEADFREE

RoHS Compliant

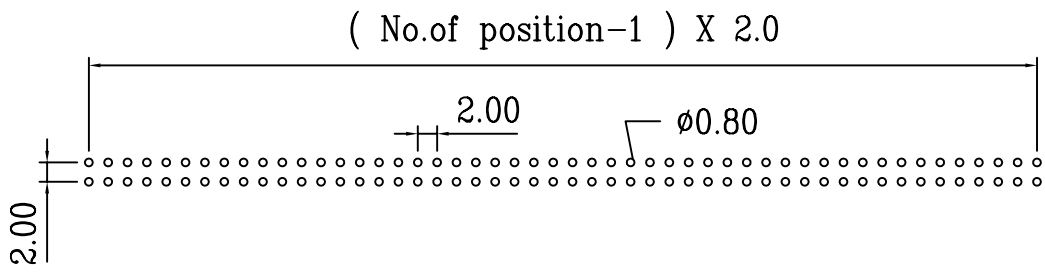

P.C.B.layout



煜倫股份有限公司

PART NO. S-R7354-2XxxE20		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: 2.0mm Female Socket h=4.9mm Right Angle type		
DWG NO. S-R7354-2XxxE20						
FILE NO.		DRAWING BY	AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1	PROJECTION				