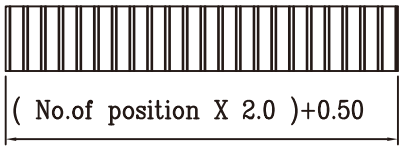

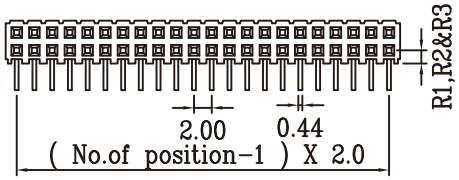



R1 : 1.50---H=4.85mm
R2 : 2.80---H=6.15mm
R3 : 2.10---H=5.45mm

SPECIFICATIONS

* Current Rating : 1 Amps
* Insulator resistance: 5000 Megohms min.
* Contacts resistance :20 m ohms max.
* Dielectric withstanding: AC 500 V
* Operating Temperature: -40°-+105°C
* Max Processing Temp: 230° for 30 seconds (260° for 7 seconds)
* Contact Material: Phosphor bronze
* Housing: NL-9T (UL 94 V-0)

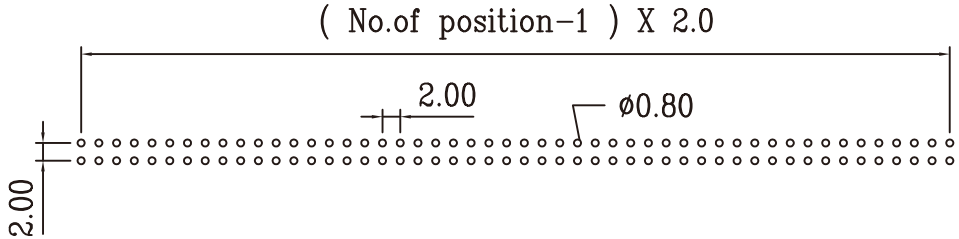

P.C.B.layout

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ± 0.50
.X ± 0.35
.XX ± 0.25
.XXX ± 0.05
ANG ±



ORDER INFORMATION

S-R73xx-2Xxx-LF

SERIES
DIP 90°
LONG 7.3mm
48:HIGH 4.85mm
61:HIGH 6.15mm
54:HIGH 5.45mm
2X03:06WAY
2X50:100WAY
LEADFREE

DESCRIPTION: 2.0mm Female Socket Right Angle type