


Recommended P.C.Board
Layout
(Tolerance: ± 0.05)

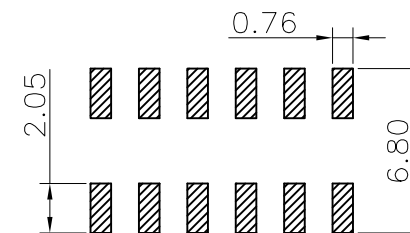

Specifications

Current Rating: 2.0Amp
 Insulation Resistance: $1000M\Omega$ Min.
 Dielectric Withstanding Voltage: 500VAC
 Contact Resistance: $20m\Omega$ Max.
 Operating Temperature: -40°C to $+105^{\circ}\text{C}$
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T(無鹵) or the equivalent material

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1:1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG \pm

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

S-V28XC-2Xxx-LF
 SERIES | LEADFREE
 180°SMT | 2X03:06WAY
 | CAP | 2X35:70WAY
 | NON POST
 | HIGH 2.8mm

DESCRIPTION: 2.00 FEMALE HEADER DUAL ROWS SMT TYPE BASE 2.80H

www.morethanall.com