
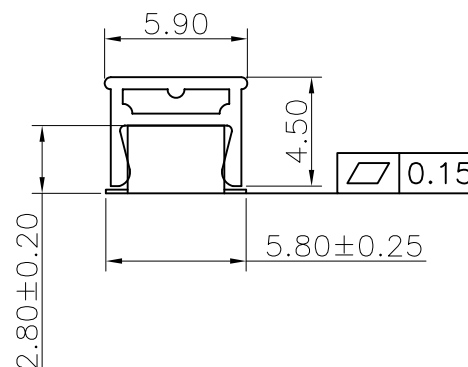
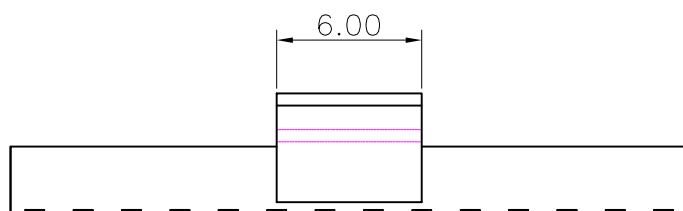



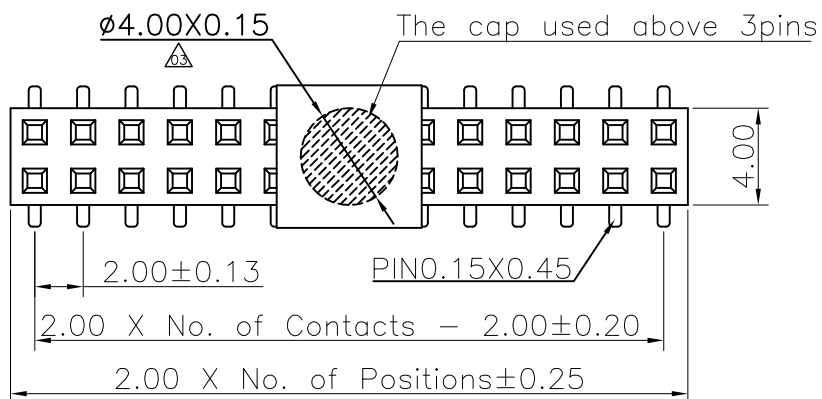

Specifications

Current Rating: 2.0Amp

Insulation Resistance: $1000M\Omega$ Min.

Dielectric Withstanding Voltage: 500VAC

Contact Resistance: $20m\Omega$ Max.

Operating Temperature: -40°C to $+105^{\circ}\text{C}$

Materials

Contact Material: Phosphor Bronze

Insulator Material: High Temperature


Thermoplastic, UL 94V-0 Nylon 6T(無鹵)

or the equivalent material

Recommended P.C.Board

Layout

(Tolerance: ± 0.05)

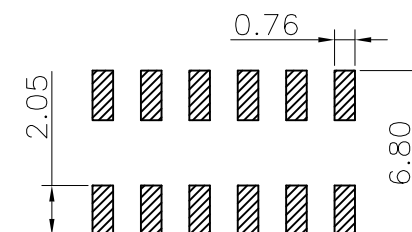

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm$




PPOJECTION

照片框

ORDER INFORMATION

S-V28XCR-2Xxx-LF
SERIES
180°SMT
HIGH 2.8mm
REEL
CAP
NON POST
LEADFREE
2X03:06WAY
2X35:70WAY

DESCRIPTION: 2.00 FEMALE HEADER DUAL ROWS SMT TYPE BASE 2.80H

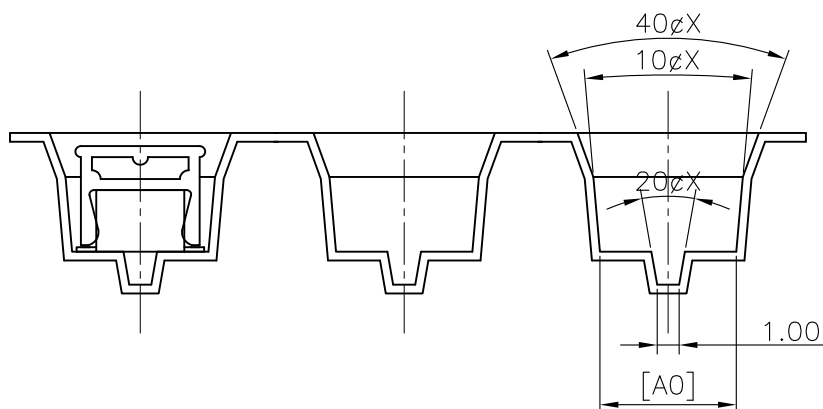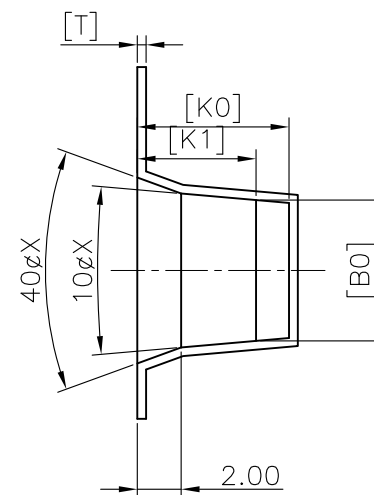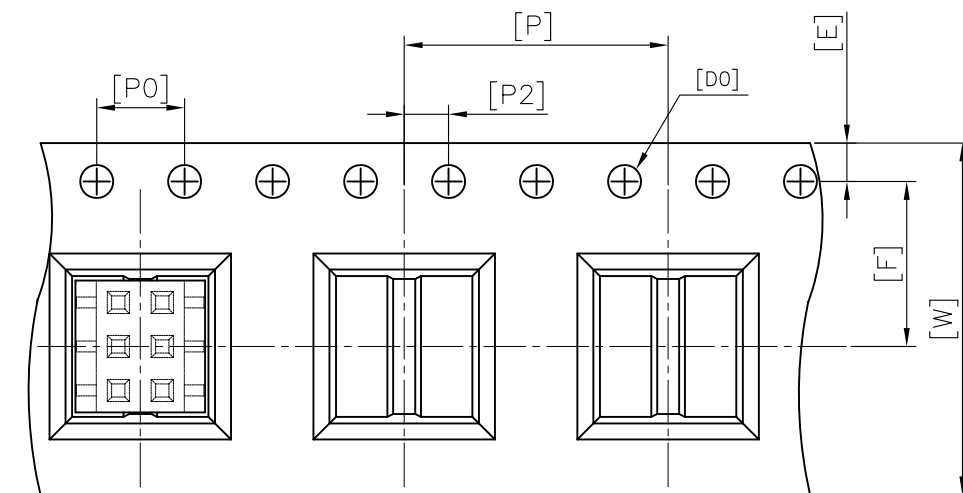

Notes:

- 1.Packing Conforms EIA-481-C Standards.
- 2.10 sprocket hole pitch cumulative tolerance $\pm 0.2\text{mm}$.
- 3.Carrier camber is within 1mm in 100mm.
- 4.Material: BLACK Polystyrene.
- 5.Packing length per 13"Reel: 10.6Meters.
- 6.Component load per 13"Reel: 800PCS.

W	16.00 ± 0.30	T	0.40 ± 0.05	Po	4.00 ± 0.10	Ao	6.20 ± 0.10
F	7.50 ± 0.10	Do	1.50 ± 0.10	P2	2.00 ± 0.10	Bo	6.40 ± 0.10
E	1.75 ± 0.10	P	12.00 ± 0.10	Ko	6.90 ± 0.10	K1	5.40 ± 0.10

14Reels/box

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X. ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

S-V28XCR-2Xxx-LF
SERIES
180°SMT
HIGH 2.8mm
LEADFREE
2X03:06WAY
2X35:70WAY
REEL
CAP
NON POST

DESCRIPTION: