
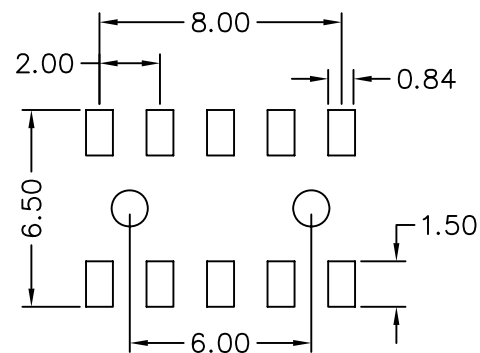
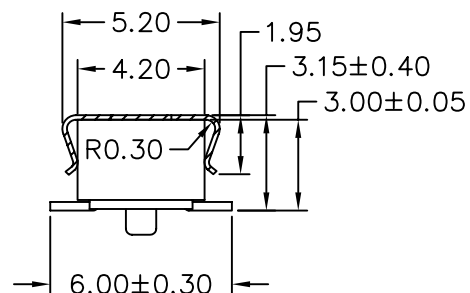
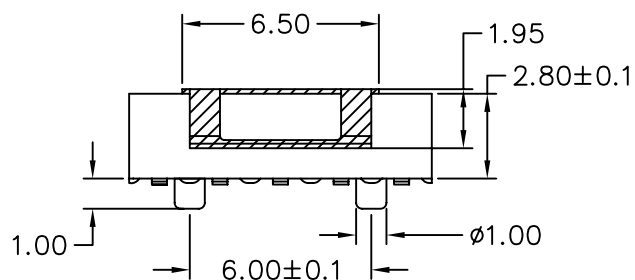


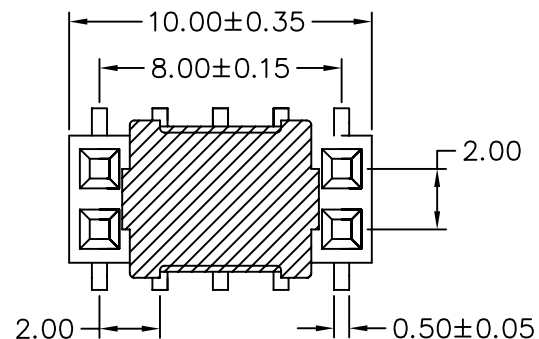

Recommended P.C.B Layout

MATERIAL
Contact Pin : Phosphor Bronze

SPECIFICATION
Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin.
Contact Resistance : 20mΩMax.
Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

S-V30PC-2X05-LF
SERIES POST CAP 10 WAY LEADFREE
180°SMT HIGH 3.0mm

DESCRIPTION: FEMALE HEADER 2.0*2.0mm
SMT TYPE, BOTTOM ENTRY HEIGHT 2.8mm, CAP+TAPE REEL