



Recommended P.C.Board
SMD Layout

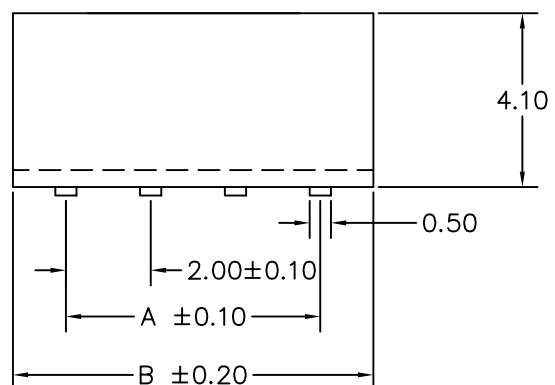

SPECIFICATIONS

Current Rating: 3 Amp
 Insulator resistance: 5000 Megohms min.
 Contact resistance: 20 m ohms max.
 Dielectric withstanding: AC 500 V
 Operating Temperature: $-40^{\circ}\sim+105^{\circ}\text{C}$
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Phosphor Bronze.
 Insulator Material: Polyester,UL 94V-0
 ©Standard:Nylon-6T

Finish: Tin,Gold plated
 ©Standard: Gold flash all over

No. of Contacts	DIMENSIONS	
	A	B
4	6.00	8.50
5	8.00	10.50
6	10.00	12.50
7	12.00	14.50
8	14.00	16.50
9	16.00	18.50
10	18.00	20.50
11	20.00	22.50
12	22.00	24.50
13	24.00	26.50
14	26.00	28.50
15	28.00	30.50
16	30.00	32.50
17	32.00	34.50
18	34.00	36.50
19	36.00	38.50
20	38.00	40.50
21	40.00	42.50
22	42.00	44.50
23	44.00	46.50
24	46.00	48.50
25	48.00	50.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ± 0.25
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

S-V43X-1XxxL-LF
 SERIES L TYPE FOOT POSITION
 1X02:02WAY
 1X40:40WAY
 180°SMT NON POST
 HIGH 4.3mm

DESCRIPTION: 2.0mm SMD SOCKET