


Recommended P.C. Board
SMD Layout

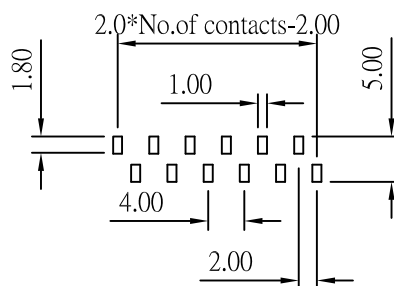

Current Rating and voltage: 2 Amps 250V(r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature
 Plastic,UL 94V-0
 Finish: Standard: Gold Flash all over

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PJECTION

照片框

ORDER INFORMATION

S-V43XC-1XxxR-LF
 SERIES | LEADFREE
 | R TYPE FOOT
 180° SMT | 1X03:03 WAY
 HIGH 4.3mm | MYLAR | 1X40:40 WAY
 | NON POST

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com