


## SPECIFICATIONS

- \* Current Rating : 3 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30 seconds  
(260° for 7 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P. (UL 94 V-0)

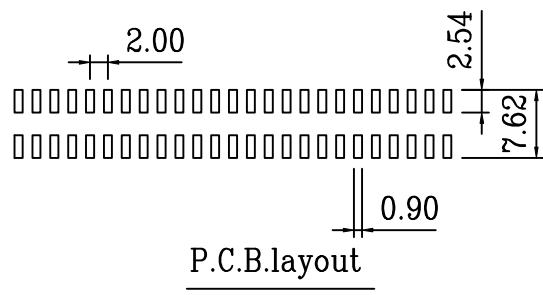

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
**煜倫股份有限公司**  
[www.morethanall.com](http://www.morethanall.com)

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.35

.XX ± 0.25

.XXX ± 0.05

ANG ±

PJECTION

照片框

**ORDER INFORMATION**

S-V43XC-2Xxx-LF  
SERIES | LEADFREE  
2X03:06WAY  
2X50:100WAY  
CAP  
180°SMT | NON POST  
HIGH 4.3mm

DESCRIPTION: 2.0mm Female Socket h=4.5mm type