

Specifications:

Current Rating:2.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm max.

Insulation Resistance:1000M ohm min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:-40°C ~ +105°C

Material and Finish

Insulator:High Temp. Plastic (Nylon 9T UL94V-0)


Insulator Color:Black

Contact:Phosphor Bronze

Finish:Gold Plated

Dimension :

Circuits	A	B	Circuits	A	B	Circuits	A	B	Circuits	A	B
04	4.00	2.00	24	24.00	22.00	44	44.00	42.00	64	64.00	62.00
06	6.00	4.00	26	26.00	24.00	46	46.00	44.00	66	66.00	64.00
08	8.00	6.00	28	28.00	26.00	48	48.00	46.00	68	68.00	66.00
10	10.00	8.00	30	30.00	28.00	50	50.00	48.00	70	70.00	68.00
12	12.00	10.00	32	32.00	30.00	52	52.00	50.00	72	72.00	70.00
14	14.00	12.00	34	34.00	32.00	54	54.00	52.00	74	74.00	72.00
16	16.00	14.00	36	36.00	34.00	56	56.00	54.00	76	76.00	74.00
18	18.00	16.00	38	38.00	36.00	58	58.00	56.00	78	78.00	76.00
20	20.00	18.00	40	40.00	38.00	60	60.00	58.00	80	80.00	78.00
22	22.00	20.00	42	42.00	40.00	62	62.00	60.00			

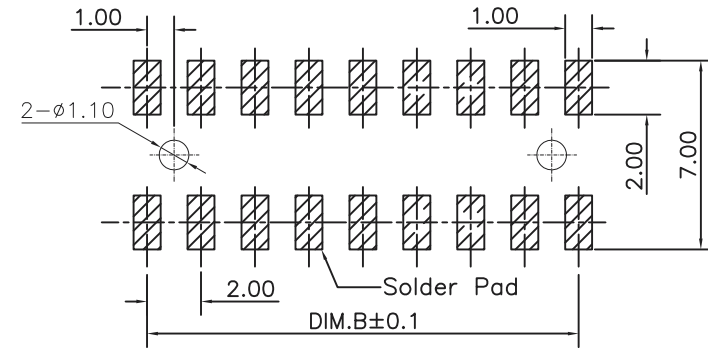

Recommended PCB Layout

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ±  
.X ± 0.20  
.XX ± 0.15  
.XXX ±  
ANG ±

照片框

ORDER INFORMATION

S-V45P-2Xxx-LF  
SERIES | LEADFREE  
2X02:04 WAY  
2X40:80 WAY  
POST  
HIGH 4.57mm  
180°SMT

DESCRIPTION: 2.0mm PCB Socket Double Row SMD Type

煜倫股份有限公司

www.morethanall.com