


Recommended P.C.B Layout

MATERIAL

Insulator: NY6T UL94-V0 
 Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP
 Insulation Resistance : 5000MΩMin.
 Contact Resistance : 20mΩMax.
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4 PPROJECTION 

X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°

照片框

ORDER INFORMATION

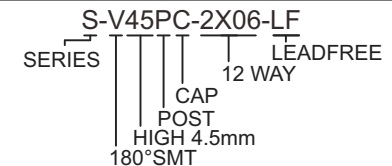

DESCRIPTION: FEMALE HEADER 2.0*2.0mm STRAIGHT TYPE, DUAL ROWS