

Recommended P.C.B Layout

**MATERIAL**

Insulator : NY6T UL94-V0  
 Contact Pin : Phosphor Bronze

**SPECIFICATION**

Current Rate : 3 AMP  
 Insulation Resistance : 5000MΩMin.  
 Contact Resistance : 20mΩMax.  
 Dielectric Voltage : AC 500V for one minute  
 Operating Temperature: -40°C to +105°C

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ±  
 ANG ± 3°

PJECTION

照片框

**ORDER INFORMATION**

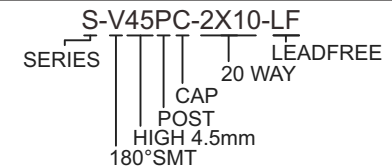

DESCRIPTION: FEMALE HEADER 2.0\*2.0mm  
 STRAIGHT TYPE, DUAL ROWS HEIGHT 4.3mm,CAP+T/R