

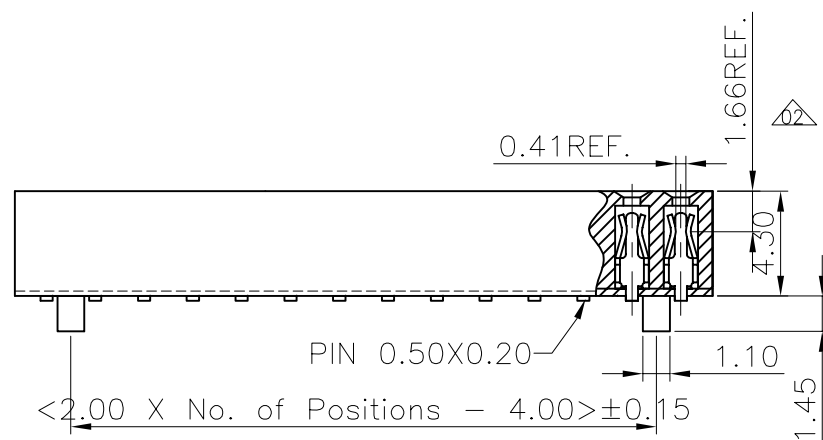


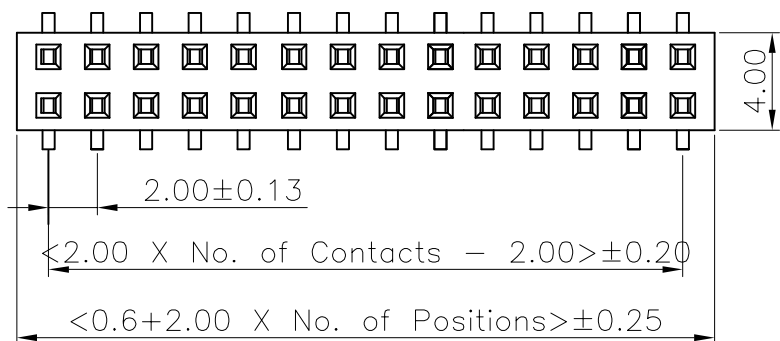

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze


Insulation Material: Polyester, UL 94V-0

Nylon 6T (Processing temp. 260°C, 10sec)

All materials must be GP materials

RECOMMENDED P.C.B LAYOUT

(Tolerance: ±0.05)

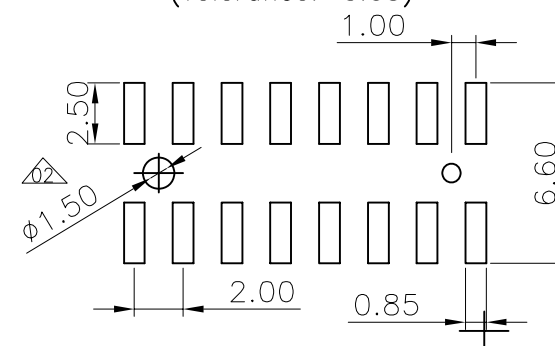

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±



ORDER INFORMATION

S-V45PW4-2Xxx-LF
SERIES LEADFREE
180°SMT 2X03:06WAY
HIGH 4.5mm 2X40:80WAY
POST WIDTH 4.0mm

DESCRIPTION: 2.00 FEMALE HEADER DUAL ROWS SMT TYPE