



Specifications:
 Current Rating: 2.0A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20m ohm max.
 Insulation Resistance: 1000M ohm min.
 Withstanding Voltage: 500V AC/minute
 Operating Temperature Range: -40°C ~ +105°C

Material and Finish
 Insulator: High Temp Plastic (Nylon 9T UL94V-0)
 Insulator Color: Black
 Terminal: Phosphor Bronze
 Plated: Gold or Tin or Plated



Dimension :

Circuits	A	B	Circuits	A	B	Circuits	A	B	Circuits	A	B
04	4.50	2.00	24	24.50	22.00	44	44.50	42.00	64	64.50	62.00
06	6.50	4.00	26	26.50	24.00	46	46.50	44.00	66	66.50	64.00
08	8.50	6.00	28	28.50	26.00	48	48.50	46.00	68	68.50	66.00
10	10.50	8.00	30	30.50	28.00	50	50.50	48.00	70	70.50	68.00
12	12.50	10.00	32	32.50	30.00	52	52.50	50.00	72	72.50	70.00
14	14.50	12.00	34	34.50	32.00	54	54.50	52.00	74	74.50	72.00
16	16.50	14.00	36	36.50	34.00	56	56.50	54.00	76	76.50	74.00
18	18.50	16.00	38	38.50	36.00	58	58.50	56.00	78	78.50	76.00
20	20.50	18.00	40	40.50	38.00	60	60.50	58.00	80	80.50	78.00
22	22.50	20.00	42	42.50	40.00	62	62.50	60.00			

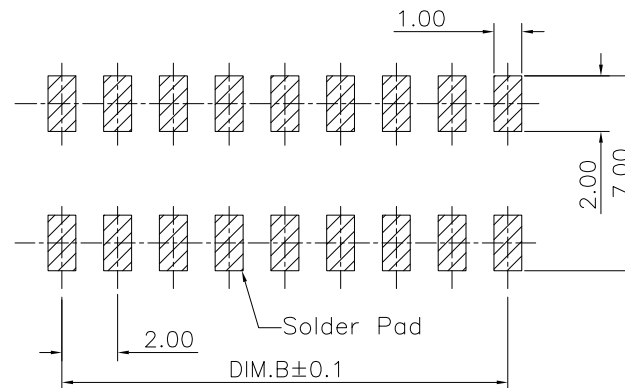

Recommended PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

S-V45XC-2Xxx-LF
 SERIES LEADFREE
 180°SMT 2X02:04WAY
 CAP 2X40:80WAY
 NON POST HIGH 4.50mm

DESCRIPTION: 2.0mm PCB Socket Double Row SMD Type