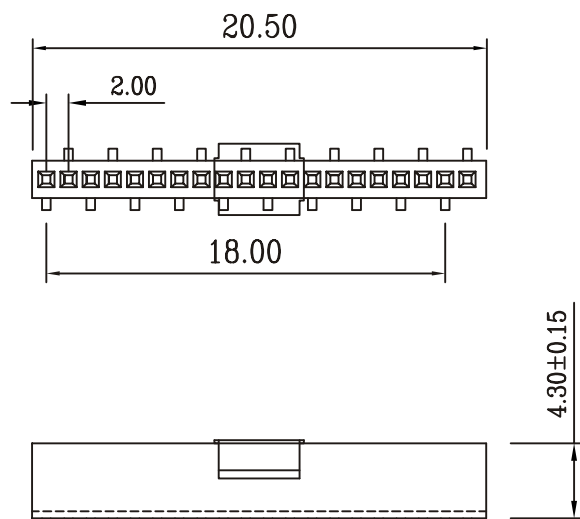


PCB LAYOUT

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40° – $+105^{\circ}$ C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: NL-9T (UL 94 V-0)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±


PPOJECTION

照片框

ORDER INFORMATION

S-V46XCR-1X10L-LF
SERIES T T T T T LEADFREE
180°SMT REEL L TYPE FOOT POSITION
HIGH 4.6mm CAP 10 WAY
NON POST

DESCRIPTION:

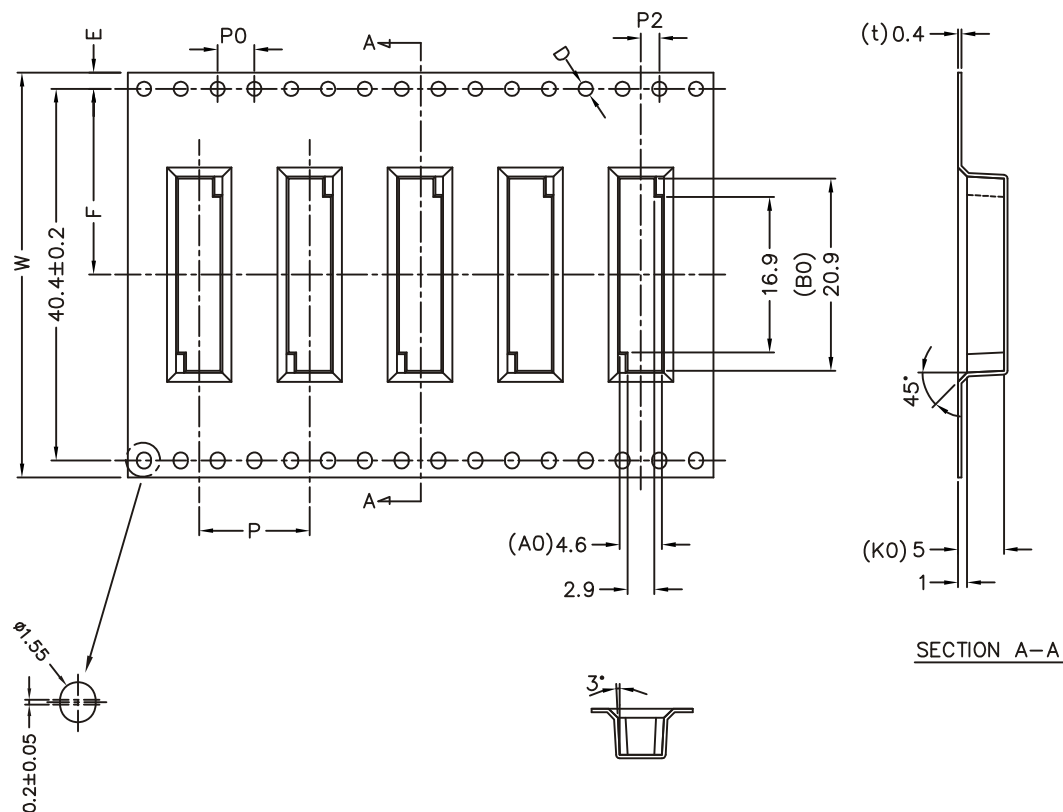

- 1.10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$.
- 2.Carrier camber not to exceed 1mm in 100mm.
3. A_0 and B_0 measured on a plane 0.3mm above the bottom of the pocket.
4. K_0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- 5.All dimensions meet EIA-481 requirements.
- 6.Material: Black Anti-static Polystyrene.
- 7.Thickness: $0.40 \pm 0.05 \text{ mm}$.
- 8.Packing length per 22" reel : 39 Meters.
- 9.Component loaded per 13" reel : 1000 pcs. (Core 4")

ITEM	W	A_0	B_0	K_0	K_1	P	F	E	D	D_1	P_0	P_2
DIM	44.0 ^{+0.30} _{-0.30}	4.60 ^{+0.20} _{-0.10}	20.9 ^{+0.20} _{-0.10}	5.00 ^{+0.20} _{-0.10}	00.0 ^{+0.10} _{-0.10}	12.0 ^{+0.10} _{-0.10}	20.2 ^{+0.15} _{-0.15}	1.75 ^{+0.10} _{-0.10}	1.50 ^{+0.10} _{-0.00}	0.00 ^{+0.25} _{-0.00}	4.00 ^{+0.10} _{-0.10}	2.00 ^{+0.15} _{-0.15}
ALTERNATE						問題?明: (Note:)						
客?確認: Customer Approved:						確認日期: Date:						

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

S-V46XCR-1X10L-LF
SERIES LEADFREE
180°SMT REEL
HIGH 4.6mm CAP
NON POST
10 WAY
L TYPE FOOT POSITION

DESCRIPTION: