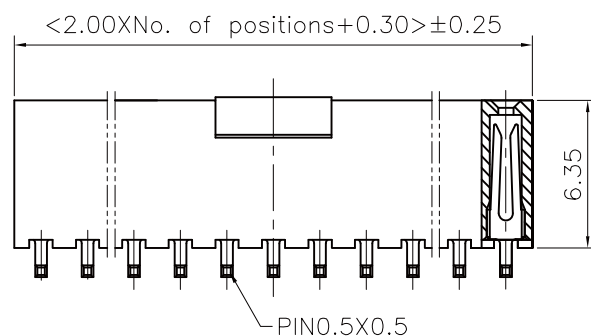

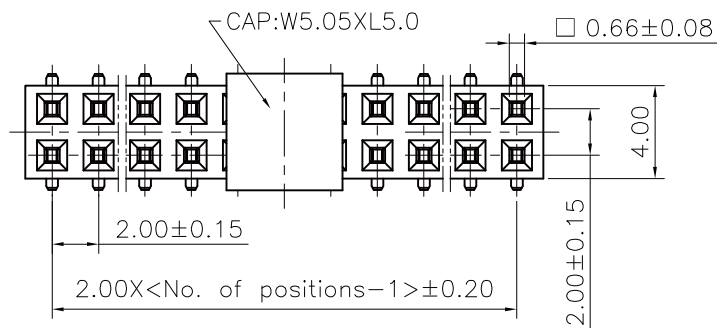


Recommended P.C.B. Layout
Tolerance:0.05mm

1. Specifications

Current Rating: 2Amp

Insulation Resistance: 1000M Ω Min.

Dielectric Withstanding: 500VAC

Contact Resistance: 20m Ω Max.

Operating Temperature:-55°C to +105°C

2. Materials

Contact Material: Phosphor Bronze.

Insulator Material: LCP UL94V-0,Color:Black.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

S-V76XC-2Xxx-LF
SERIES LEADFREE
180°SMT 2X03:06WAY
CAP 2X50:100WAY
NON POST
HIGH 7.6mm

DESCRIPTION: 2.00 FEMALE HEADER DUAL ROWS SMT TYPE SERIES