

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩMin.

Dielectric Withstanding Voltage: 500VAC

Contact Resistance: 20mΩMax.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze


Insulator Material: High Temperature

Thermoplastic, UL 94V-0 LCP or

the equivalent material

Recommended P.C.B. Layout

(Tolerance: 0.05mm)

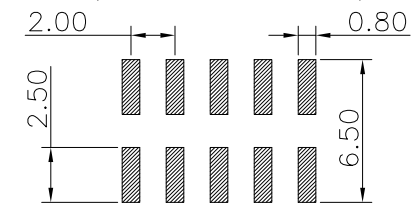

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

P PROJECTION

照片框

ORDER INFORMATION

S-W63X-2Xxx-LF

SERIES | LEADFREE  
2X02:04 WAY  
2X40:80 WAY  
NON POST  
LONG 6.35mm  
90°SMT

DESCRIPTION: 2.00 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR