
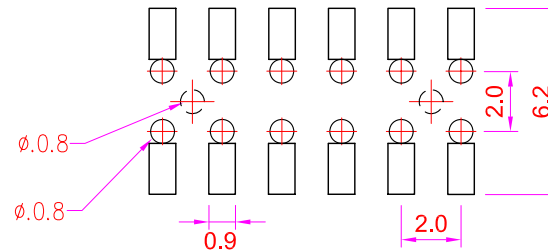


## Recommended P.C. Board SMD Layout

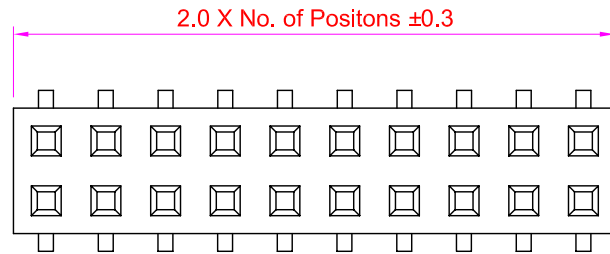

### Specifications

Current Rating : 2 Amps

Insulator Resistance : 1000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 500V



Operating Temperature :  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Material : Phosphor Bronze

Insulator Material : Polyester, UL 94V-0

Standard : Nylon-6T

Contact Plated : See Option Standard: Full Gold Flash

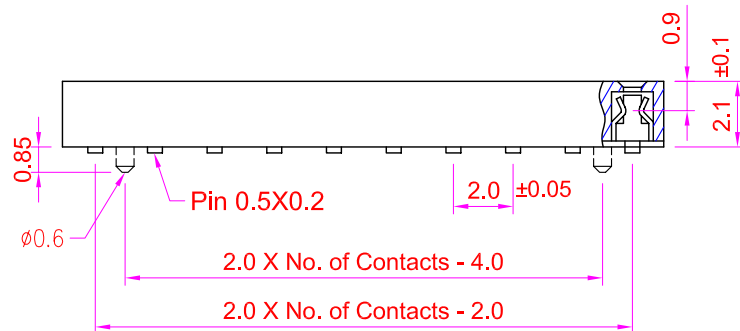

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$

.X,  $\pm$

.XX,  $\pm$

.XXX,  $\pm$

ANG,  $\pm$

PPOJECTION

照片框

### ORDER INFORMATION

SERIES S-Z23P-2Xxx-LF  
LEADFREE  
2X02:04WAY  
2X40:80WAY  
POST  
HIGH 2.3mm  
BOTTOM ENTRY SMT

DESCRIPTION: