
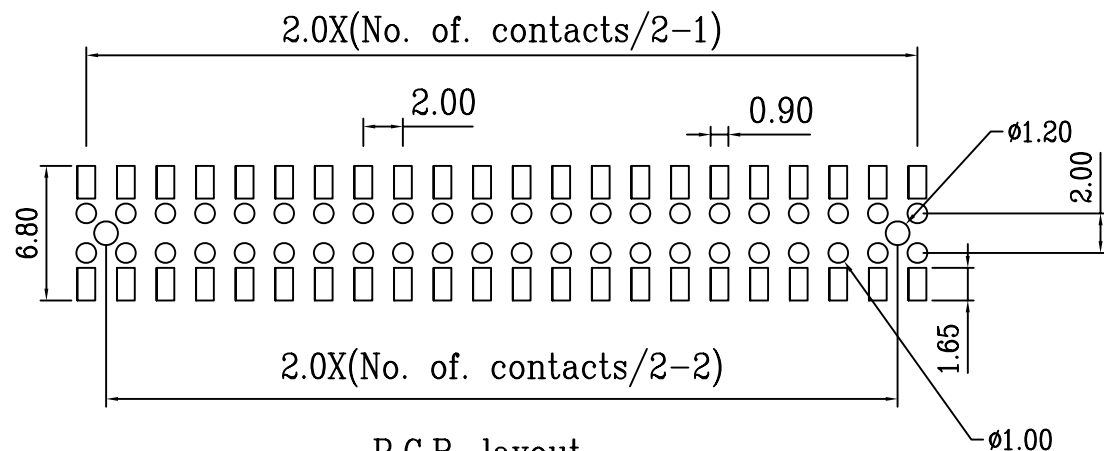
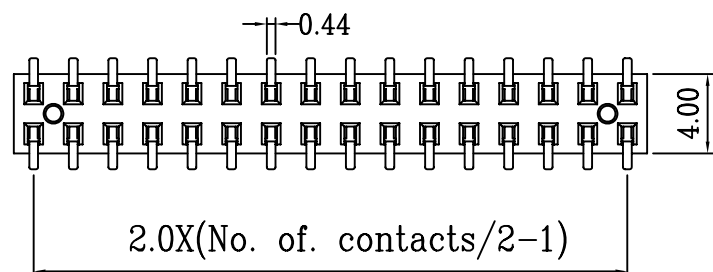



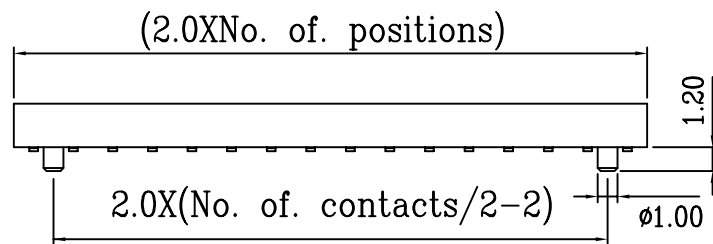

P.C.B. layout

## SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature:  $-40^{\circ}$ – $+105^{\circ}$ C
- \* Max Processing Temp:  $230^{\circ}$  for 30 seconds  
( $260^{\circ}$  for 7 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P. (UL 94 V-0)

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

**ORDER INFORMATION**

S-Z24PC-2Xxx-LF  
SERIES  
LEADFREE  
2X02:04WAY  
2X40:80WAY  
CAP  
POST  
HIGH 2.4mm  
BOTTOM ENTRY SMT

DESCRIPTION: 2.0mm Female Socket h=2.4mm Bottom Entry type