

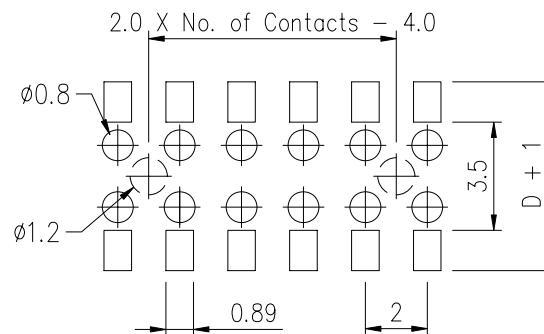
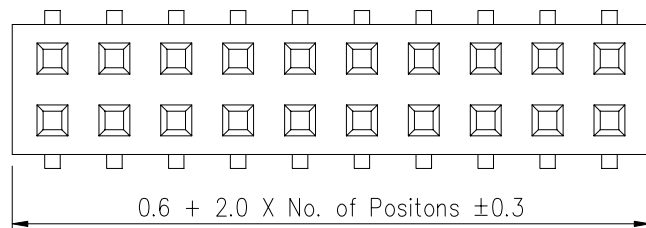




Recommended
P.C. Board Layout

Specifications

Current Rating : 2 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T
 Contact Plated : See Option / Standard: Full Gold

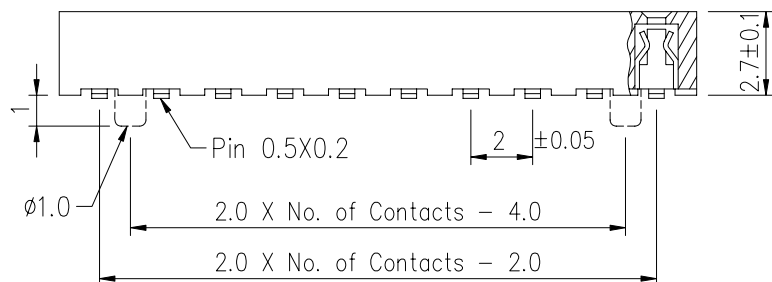

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

ORDER INFORMATION

S-Z28P-2Xxx-LF
 SERIES 2X02:04WAY LEADFREE
 2X40:80WAY
 POST
 HIGH 2.8mm
 BOTTOM ENTRY SMT

DESCRIPTION: Female Header P2.0mm Profile : 2.7mm, Dual Rows, SMT Type