
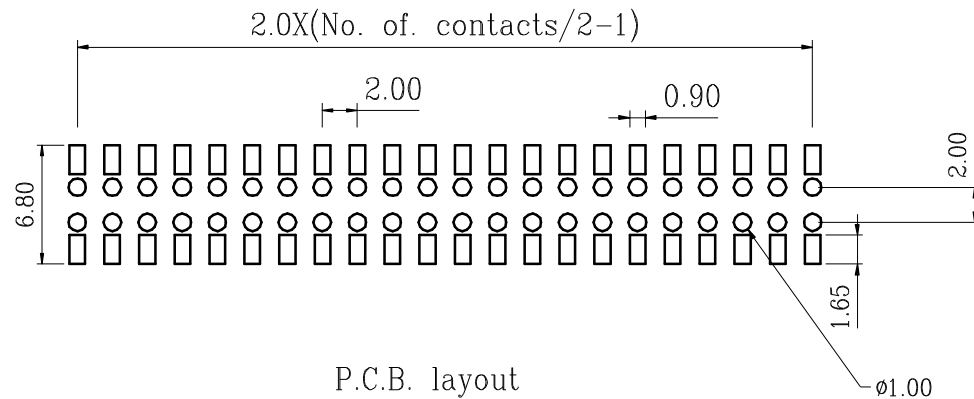
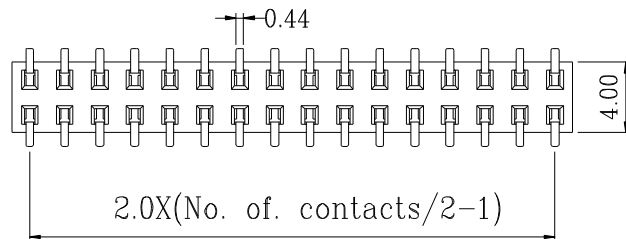



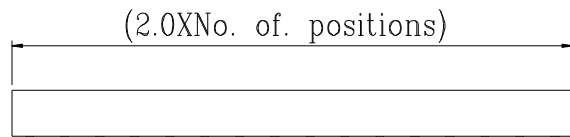

P.C.B. layout

SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40° – $+105^{\circ}$ C
- * Max Processing Temp: 230° for 30 seconds
(260° for 7 seconds)
- * Contact Material: Phosphor bronze
Contact plating : Gold flash
- * Housing: L.C.P. (UL 94 V-0)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
.X ± 0.35
.XX ± 0.25
.XXX ± 0.05
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

S-Z28XC-2Xxx-LF
SERIES
BOTTOM ENTRY SMT
HIGH 2.8mm
LEADFREE
2X03:06 WAY
2X50:50 WAY
CAP
NON POST

DESCRIPTION: 2.0mm Female Socket h=2.8mm Bottom Entry type