




03~10 pin : 0.10 mm MAX.
11~25 pin : 0.20 mm MAX.
26~40 pin : 0.30 mm MAX.



Recommended P.C. Board
SMD Layout

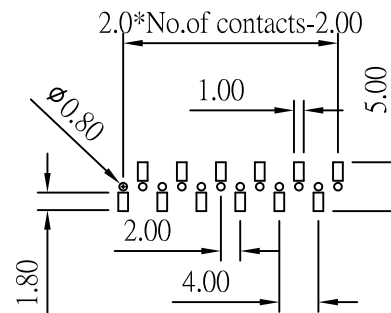

Current Rating and voltage: 2 Amps 250V(r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Plastic,UL 94V-0
Finish: Standard: Gold Flash all over

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

S-Z43XC-1XxxL-LF
SERIES
BOTTOM ENTRY SMT
HIGH 4.3mm
MYLAR
NON POST
LEADFREE
L TYPE FOOT
1X03:03 WAY
1X40:40 WAY

DESCRIPTION: