
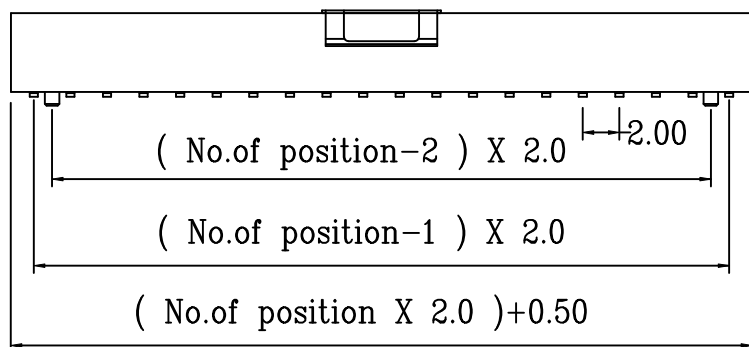
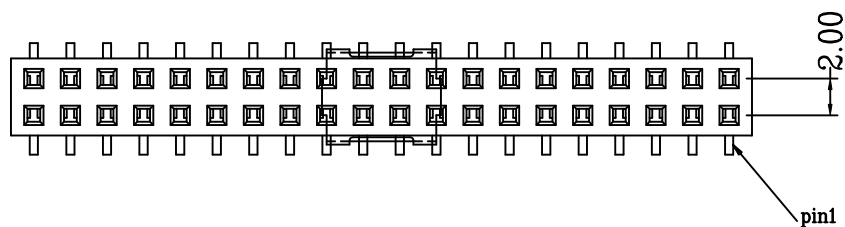


## SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature:  $-40^{\circ}$ – $+105^{\circ}$ C
- \* Max Processing Temp:  $230^{\circ}$  for 30 seconds  
( $260^{\circ}$  for 7 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P. (UL 94 V-0)

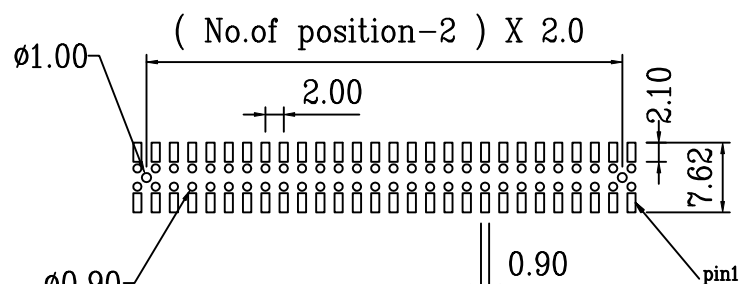

P.C.B.layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X.  $\pm 0.50$   
.X  $\pm 0.35$   
.XX  $\pm 0.25$   
.XXX  $\pm 0.05$   
ANG  $\pm$

PPOJECTION

照片框

**ORDER INFORMATION**

S-Z45PC-2Xxx-LF  
SERIES  
BOTTOM ENTRY SMT  
CAP  
POST  
HIGH 4.5mm  
LEADFREE  
2X03:06WAY  
2X50:100WAY

DESCRIPTION: 2.0mm Female Socket h=4.5mm type