
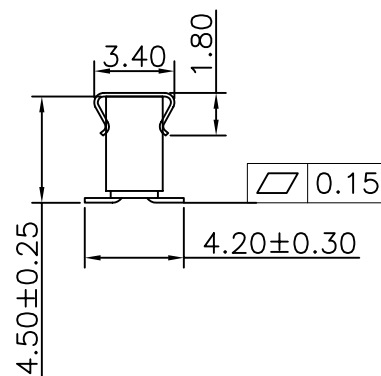

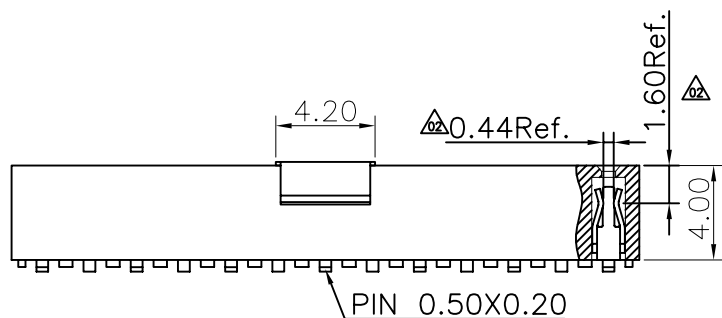


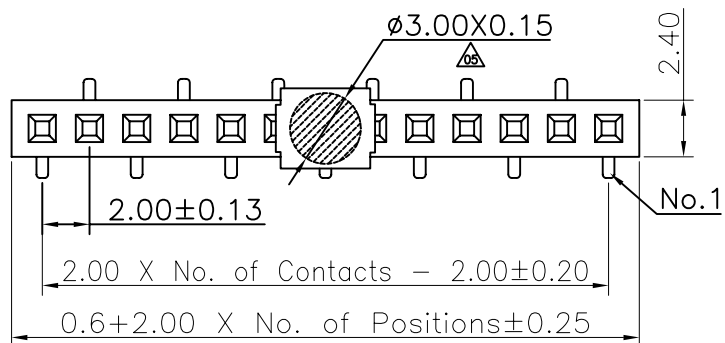

Specifications

Current Rating:2Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:500VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C


Materials

Contact Material:Phosphor Bronze

Insulator Material:High Temperature

Thermoplastic, UL 94V-0 Nylon 6T(無鹵)
or the equivalent material

Recommended P.C.Board Layout FOR BOTTOM ENTRY (Tolerance:±0.05)

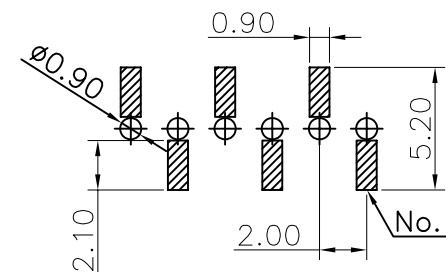

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

S-Z45XC-1XxxR-LF
SERIES | LEADFREE
R TYPE FOOT
BOTTOM ENTRY SMT | 1X02:02 WAY
HIGH 4.5mm | 1X40:40 WAY
CAP
NON POST

DESCRIPTION:2.00 FEMALE HEADER SINGLE ROW SMT TYPE BASE 4.30H