
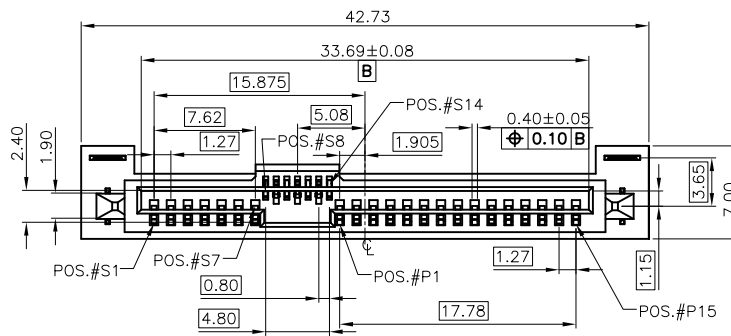

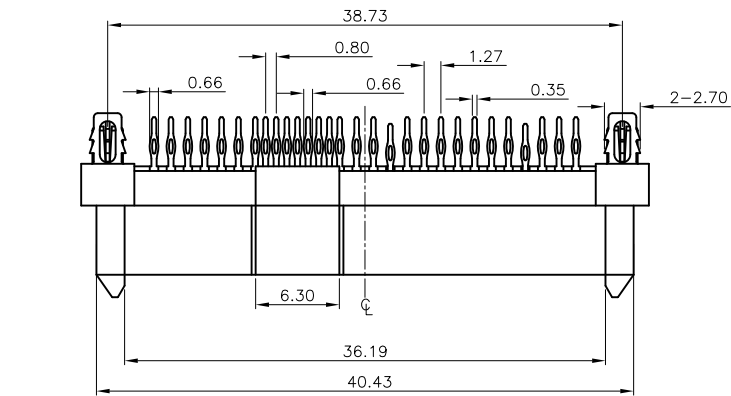





SECTION B-B

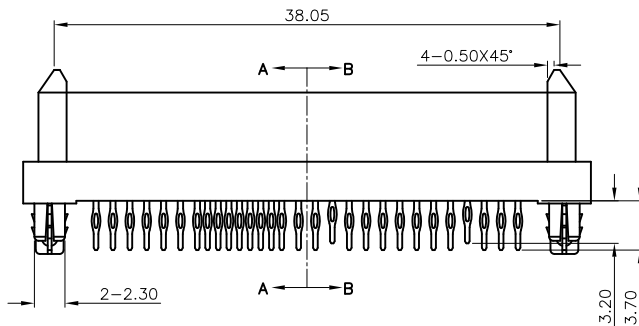

SECTION A-A

TABLE

CONTACT	DIM=A
15u"	9.00
30u"	9.00
15u"	8.35
30u"	8.35

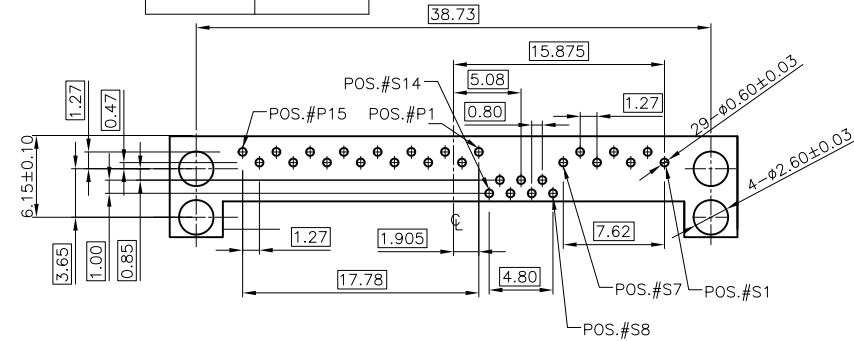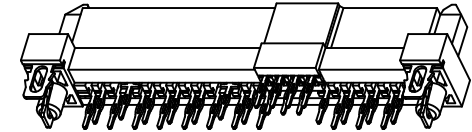

RECOMMENDED PCB LAYOUT

THICKNESS=1.6~3.0mm

NOTE:

1.MATERIAL :

HOUSING:High Temperature Thermoplastic,UL94V-0,COLOR:BLACK
 TERMINAL(max): Copper Alloy,THICKNESS=0.30mm
 TERMINAL(min): Copper Alloy,THICKNESS=0.25mm
 LATCH:SUS,THICK=0.30±0.01

2,PLATING:

CONTACT: Au OVER 50u" MIN NICKEL UNDERPLATE
 SOLDER TAIL: 100u"MIN MISTY TIN 50u" MIN NICKEL UNDERPLATE

3.ELECTRONICAL SPECIFICATION:

CURRENT RATING: 1.5 AMPERE PER CONTACT
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.
 OPERATING TEMPERATURE: -20°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ± 1°

照片框

ORDER INFORMATION

SAS-SPMP-29-LF
 SERIES T T LEADFREE
 29 WAY
 METAL POST
 PRESS FIT
 FEMALE

DESCRIPTION: SAS 29P母頭魚眼孔兩柱加四個(W=2.7)魚叉