

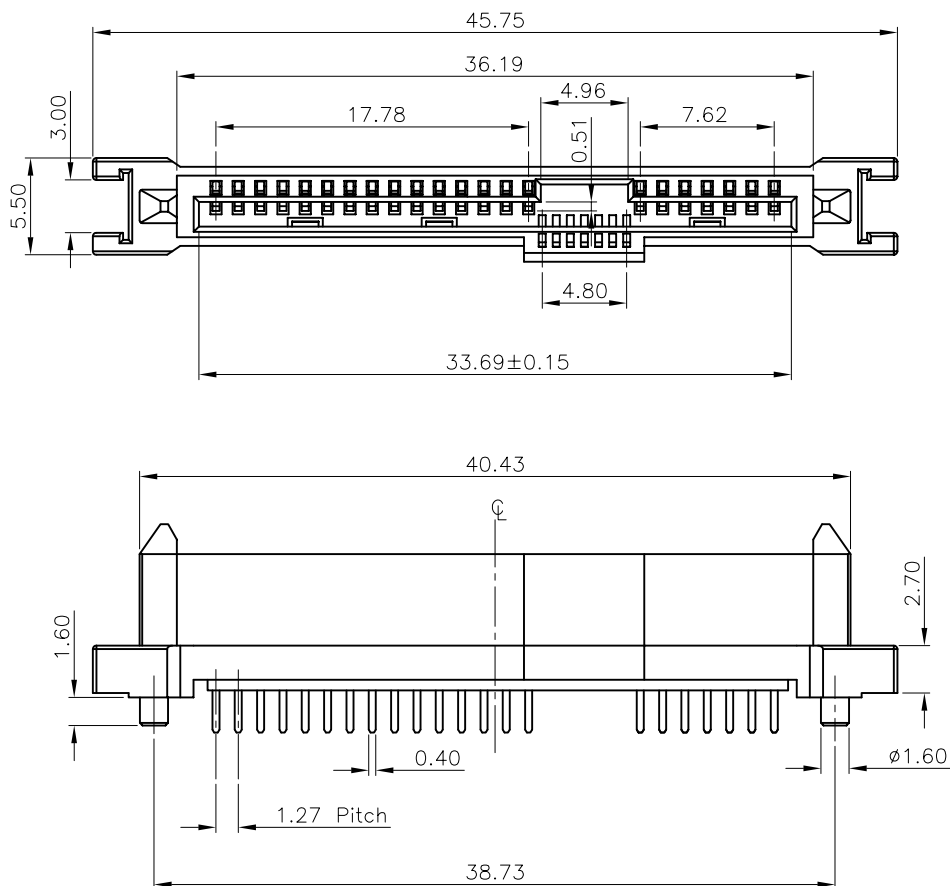


TABLE 1

SAS-SS-29	15 U" GOLD	PA BLACK
PART NO.	PLATED	COLOR FOR THE PLASTIC

NOTE:

- 1.MATERIAL :
HOUSING : High Temperature Thermoplastic ,
UL94V-0, COLOR : BLACK
TERMINAL: COPPER ALLOY,THICKNESS = 0.30 mm
- 2.PLATING:
CONTACT:GOLD OVER 50u" MIN NICKEL UNDERPLATE(SEE TABLE1)
SOLDER TAIL: 150u"MIN MISTY TIN 50u" MIN NICKEL UNDERPLATE
GOLD SPECIFICATION:SEE TABLE
- 3.ELECTRONICAL SPECIFICATION:
CURRENT RATING: 1.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.
OPERATING TEMPERATURE: -20°C~+85°C
- 4.MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT(ROHS)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SAS-SS-29-LF
SERIES | T LEADFREE
29 WAY
SOLDER
FEMALE

DESCRIPTION: ASSEMBLY OF SAS 29P Vertical (For cable)