
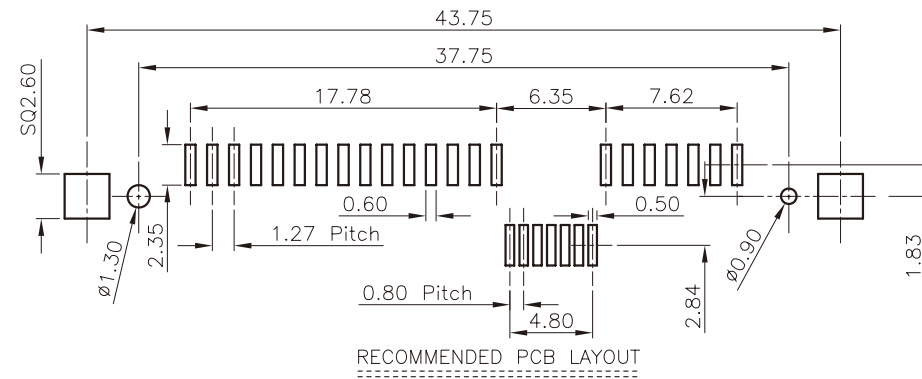

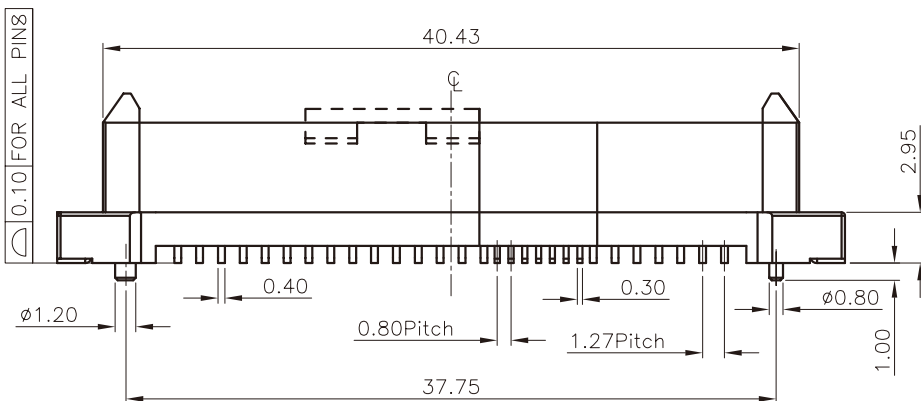


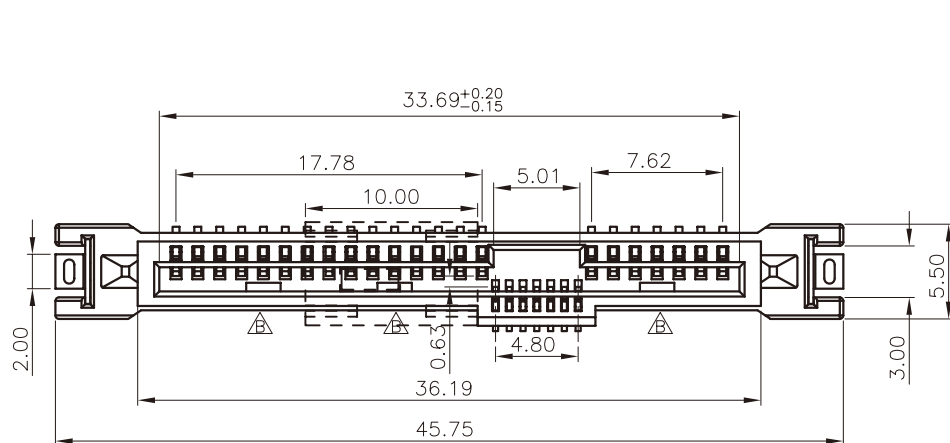

NOTE:

1.MATERIAL :

HOUSING : High Temperature Thermoplastic ,
UL94V-0, COLOR : BLACK

TERMINAL(max): Copper Alloy,THICKNESS = 0.30 mm

TERMINAL(min): Copper Alloy,THICKNESS = 0.25 mm

FORKLOCK: Copper Alloy,THICKNESS = 0.30 mm

2.PLATING:

CONTACT:GOLD OVER 50u" MIN NICKEL UNDERPLATE(SEE TABLE)

SOLDER TAIL: 150u"MIN MISTY TIN 50u" MIN NICKEL UNDERPLATE

GOLD SPECIFICATION:SEE TABLE

3.ELECTRONICAL SPECIFICATION:

CURRENT RATING: 1.5 AMPERE PER CONTACT

CONTACT RESISTANCE: 30 MILLIOHMS MAX.

INSULATION RESISTANCE: 1000 MEGOHMS MIN.

DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.

OPERATING TEMPERATURE: -20°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SAS-SVPC-29-LF
SERIES T T T LEADFREE
29 WAY
CAP
POST
180° SMT
FEMALE

DESCRIPTION: SAS 29P 母頭 SMT柱子大小型