


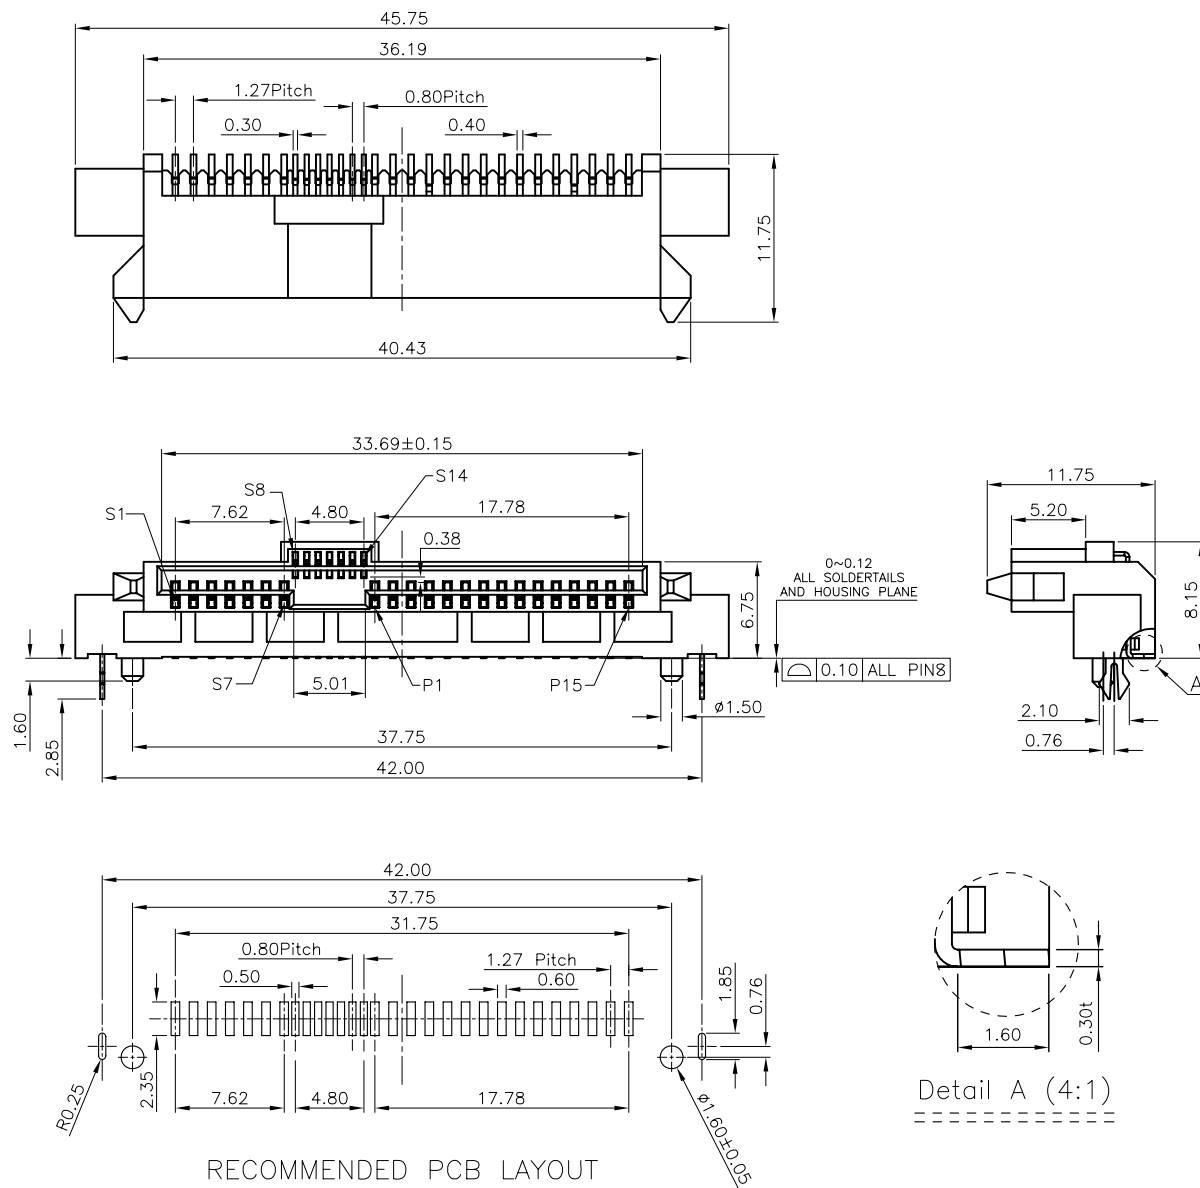

NOTE:

1.MATERIAL :

HOUSING : High Temperature Thermoplastic ,
UL94V-0, COLOR : BLACK

TERMINAL(max): Copper Alloy,THICKNESS = 0.30 mm

TERMINAL(min): Copper Alloy,THICKNESS = 0.25 mm

FORKLOCK: Copper Alloy,THICKNESS = 0.30 mm

2,PLATING:

CONTACT:GOLD OVER 50u" MIN NICKEL UNDERPLATE(SEE TABLE1)

SOLDER TAIL: 150u"MIN MISTY TIN 50u" MIN NICKEL UNDERPLATE

GOLD SPECIFICATION:SEE TABLE

3.ELECTRONICAL SPECIFICATION:

CURRENT RATING: 1.5 AMPERE PER CONTACT

CONTACT RESISTANCE: 30 MILLIOHMS MAX.

INSULATION RESISTANCE: 1000 MEGOHMS MIN.

DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.

OPERATING TEMPERATURE: -20°C~+85°C

4.MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC

OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27
JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN

HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC
EQUIPMENT(ROHS)

RECOMMENDED PCB LAYOUT

Detail A (4:1)

=====

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SAS-SWB81PZ-29-LF
SERIES | | | | LEADFREE
29 PIN
POST+CLIP
HIGH 8.15mm
FEMALE | | | | BOTTOM CONTACT
90°SMT

DESCRIPTION: ASSEMBLY OF SAS 29P SOCKET R/A SMT BOTTOM WITHOUT BULGE