
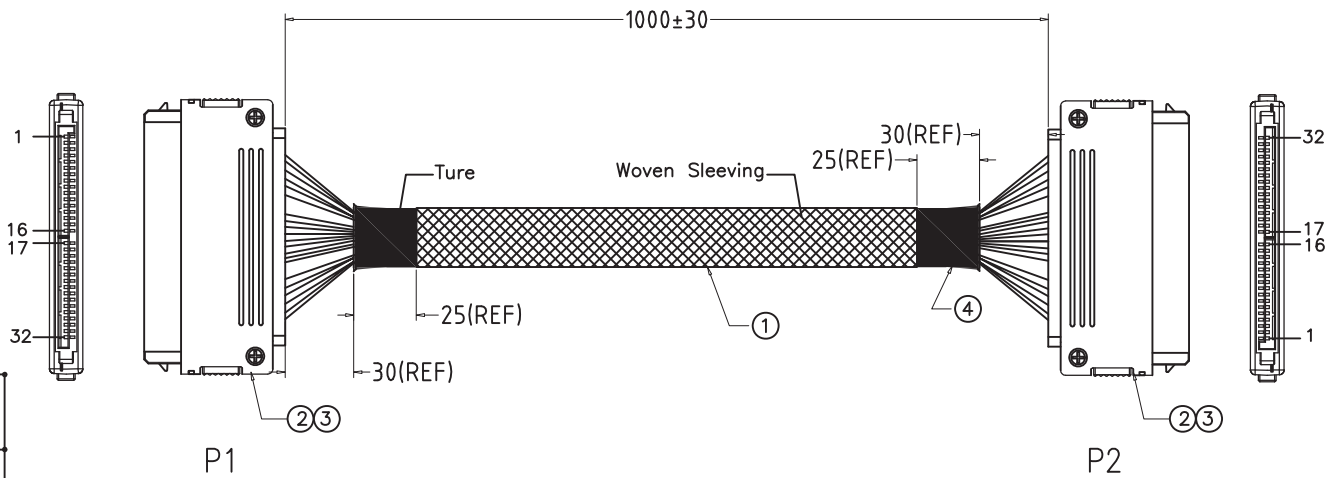


**PIN ASSIGNMENT:**

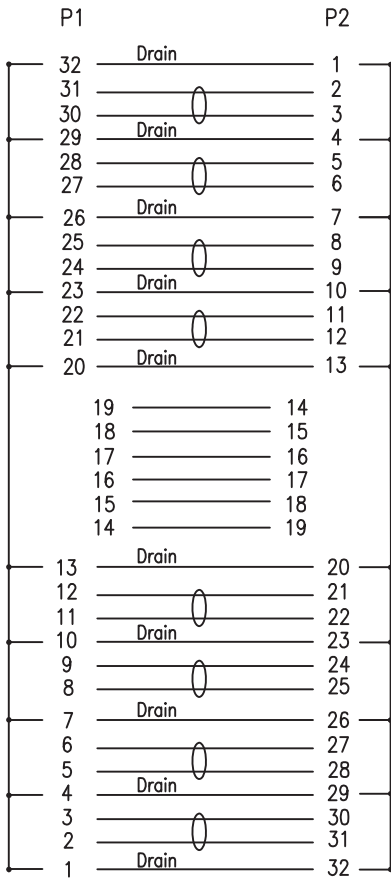

**ELECTRICAL CHARACTER:**

- 1)100% OPEN&SHORT TESTING
- 2)WITHSTANDING VOLTAGE:DC 300V 0.01Sec
- 3)INSULATION RESISTANCE:10M Ohm(Min)
- 4)CONDUCTIVE RESISTANCE:2 Ohm(Max)

**SASX2-3232T2-F1M-LF**  
LEADFREE

**RoHS Compliant**

5	Cable2	FLAT CABLE UL2651 30AWG×6C GRAY	
4	Tube	WOVEN SLEEVING TUBE BLACK	
3	Innermold	PE Low density	
2	Conn.1	SAS 4i CABLE RECEPTACLE (32P CONNECTOR)	
1	Cable1	(30AWG×2C+2D)×AL.MYLAR+MYLAR W/O JACKET	
NO.	PART NAME	SPEC DESCRIPTION	REMARK



PART NO. SASX2-3232T2-F1M

DWG NO. SASX2-3232T2-F1M

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIP TION:

**煜倫股份有限公司**

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE