
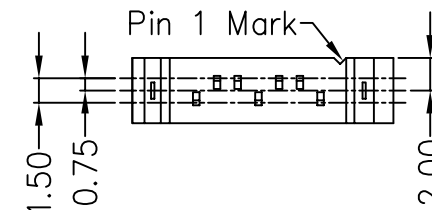

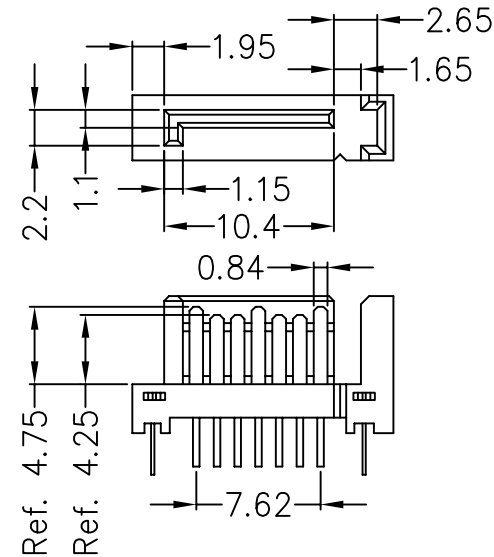
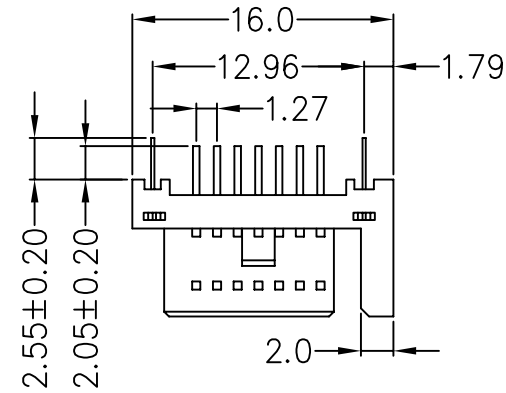



Material :
 Insulator : Thermoplastic (Meet UL94V-0).
 Contact : Copper Alloy.
 Contact Plated : 1μ " Gold over Nickel.
 15μ " Gold over Nickel.
 Solder Tail Plated : 100μ " Tin Min. over Nickel.

Pin Definition :

S1	GND	2 nd Mate
S2	A+	Differntial Signal Pair A from Phy
S3	A-	
S4	GND	2 nd Mate
S5	B+	Differntial Signal Pair B from Phy
S6	B-	
S7	GND	2 nd Mate

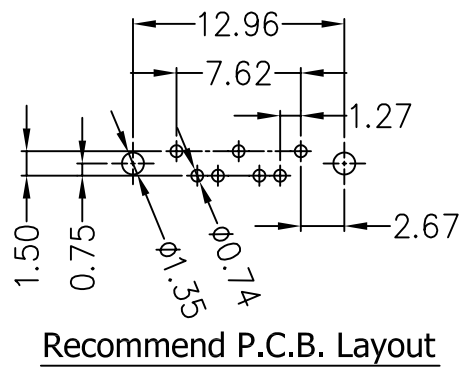

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

SATA-PDL15-07-LF

SERIES 07 WAY LEADFREE
 ROW/PITCH 1.5mm
 LEFT
 DIP 180°
 MALE

DESCRIPTION: SATA Signal 7 Pins Plug Vertical Pin Out B1 Type