
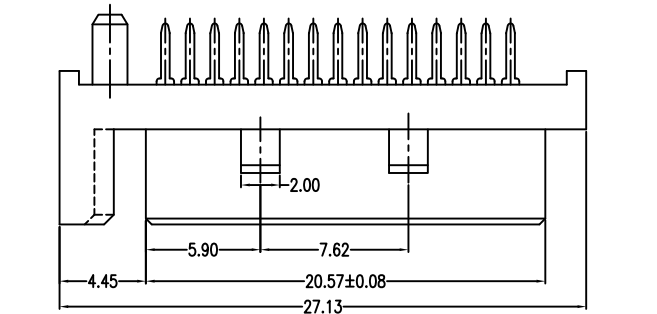




P.C.B LAYOUT(T=1.60mm)
COMPONENT SIDE

Power Segment			
PIN NO.	Type	PIN NO.	Type
P1	V33	P9	V5
P2	V33	P10	GND
P3	V33	P11	DAS/DSS
P4	GND	P12	GND
P5	GND	P13	V12
P6	GND	P14	V12
P7	V5	P15	V12
P8	V5		



NOTES:

*Material

Housing: LCP+50%G.F., UL 94V-0 Rated, Color: Black;
Contact: Brass;
Plating: Au plating on contact area;
Sn(100u" Min.) plating on solder tail;
Ni(40u" Min.) underplating overall.

*Mechanical

Insertion Force: 45N max.
Withdrawal Force: 10N min.
Durability: 500 cycles

*Electrical Specification

Current Rating: 1.5 Ampere per contact;
Contact Resistance: 30 mΩ max.
Insulation Resistance: 1000 MΩ min.
Dielectric Withstanding Voltage: 500V AC.

*Environmental

Operating Temperature: -55°C to +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ±

照片框

ORDER INFORMATION

SATA-PDP-15-LF
SERIES
LEADFREE
15 WAY
POST
DIP 180°
MALE

DESCRIPTION: SATA 15P DIP Male (Vertical Type)