

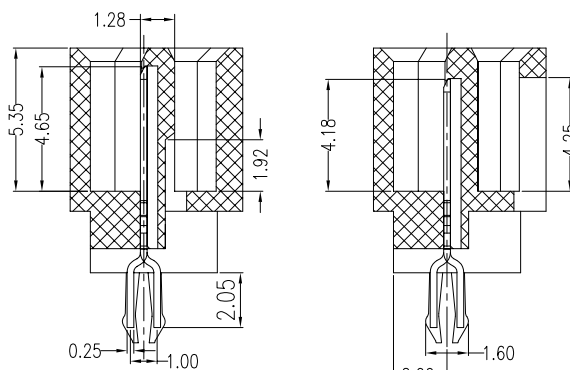


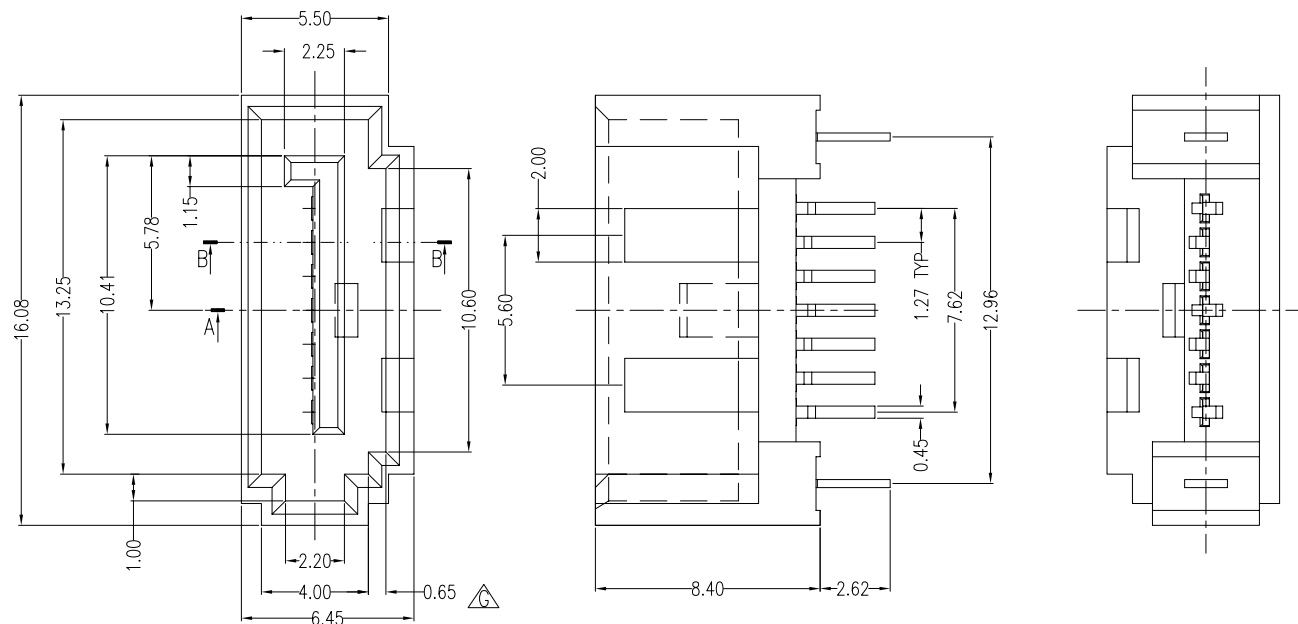

SECT A-A

SECT B-B

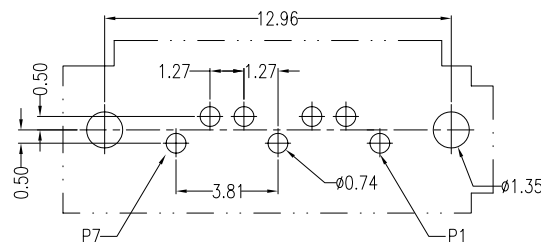

P.C.B. Layout
(T=1.60mm)

NOTES:

*Material

Housing: LCP or Nylon46, UL 94V-0 rated, Color: Black.
Contact: Brass & Phosphor Bronze
Plating: Gold Plating over Nickel on Contact Area; Tin Plating on Solder Tail.

*Mechanical

Insertion Force: 45N Max.
Withdrawal Force: 10N Min.
Durability: 500 Cycles.

*Electrical Specification

Current Rating: 1.5 Ampere Per Contact;
Contact Resistance: 30 Milliohms Max.
Insulation Resistance: 1000 Megohms Min.
Dielectric Withstanding Voltage: 500 V AC.

*Environmental

Operating Temperature: -55°C to +125°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SATA-PDR10ZC-07-LF

SERIES | | | | LEADFREE
MALE | | | | 07WAY
DIP 180° | | | | CAGE
ROW/PITCH 1.0mm
RIGHT

DESCRIPTION: 7P Shield Double Hole DIP A Type (Male)