




SECT A-A

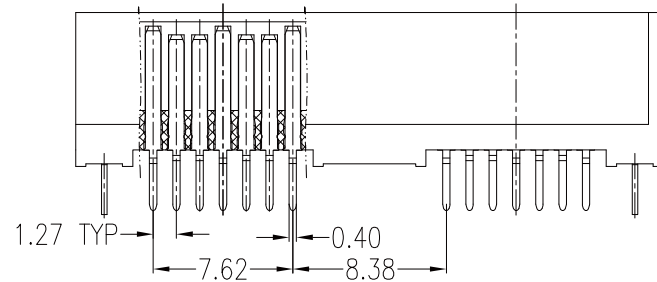

SECT B-B

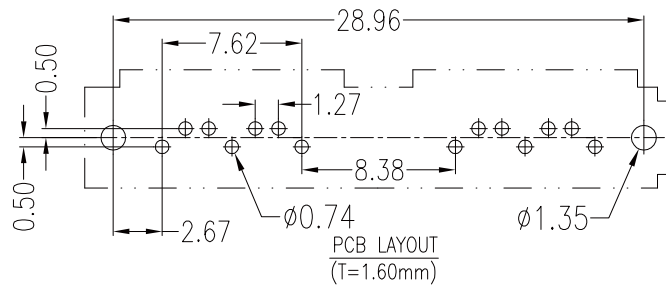

NOTES:

***Material**

Housing: NYLON46, UL 94V-0 rated,
Color: Black;
Contact: Brass;
Plating: Gold plating over Nickel on contact
area; Tin/Lead plating on terminal.

***Mechanical**

Insertion Force: 45N max.
Withdrawal Force: 10N min.
Durability: 500 cycles.

***Electrical Specification**

Current Rating: 1.5 Ampere per contact;
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 1000 megohms min.
Dielectric Withstanding Voltage: 500 V AC.

***Environmental**

Operating Temperature: -55°C to +125°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ±

PJECTION

照片框

ORDER INFORMATION

SATA-PDZ-7+7-LF
SERIES LEADFREE
 7+7 WAY
DIP 180°
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Serial ATA 7+7P Box-Type Two Hole DIP A Model Male Drawing